



c






d





e

f

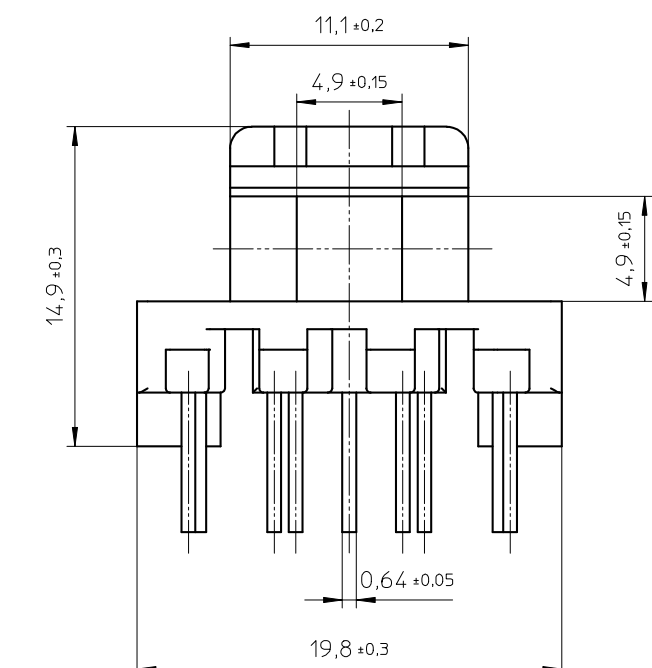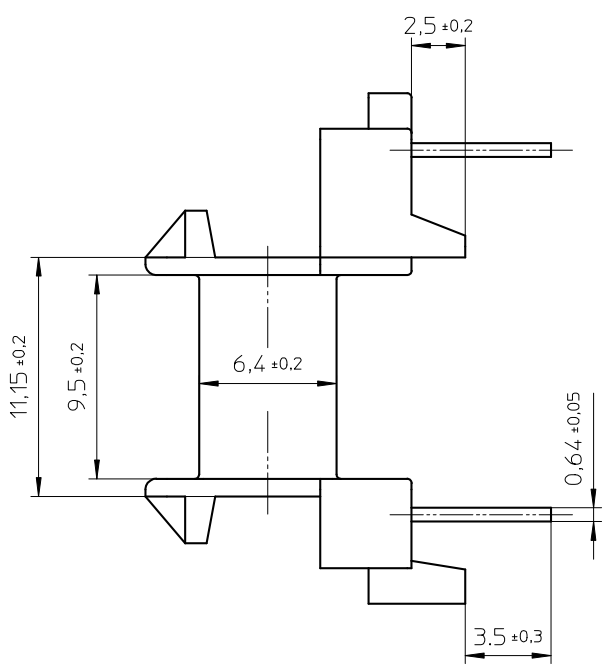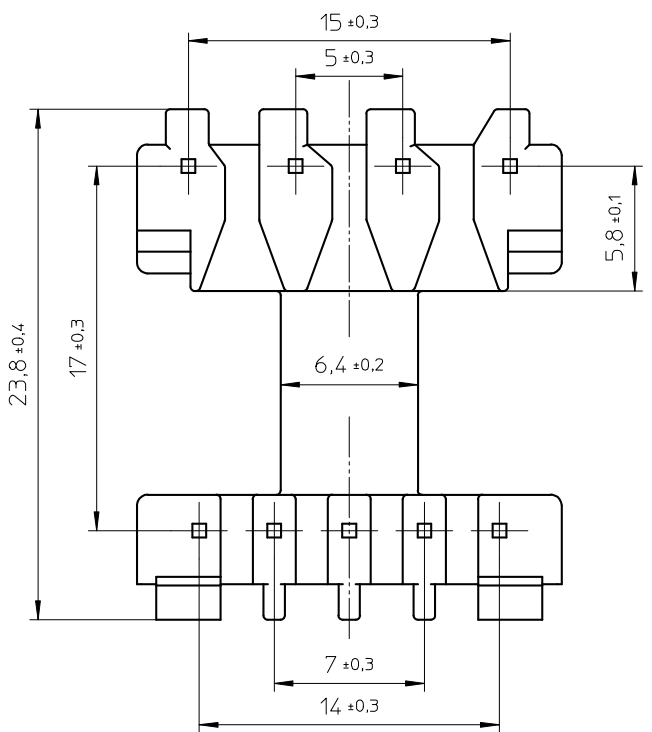

Proposed hole pattern:

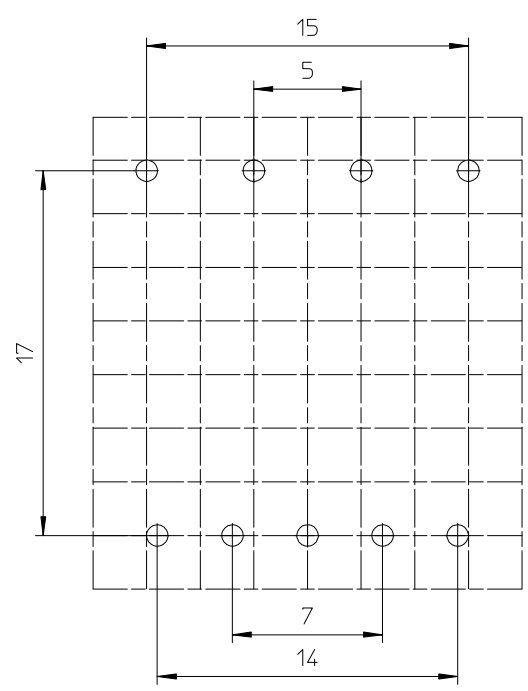

- Coil former material: Sumikon PM-9820 (PF), glass-reinforced.
UL file number: E41429 - UL94V-0.
- Pin material: Copper-clad steel, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s
- Min. winding area: 40.2 mm .
- Mean length of turn: 46.4 mm.

CLASSNO.		CSH-E16/5-1S-9P		4322 021 02761		1999-01-04
						2004-11-29
						2005-03-11
						2009-09-11
						2010-03-31
NAME NAAM	M.Trynqiel	SUPERS. VERV.	001	SPSH BL/BL	112 - 01	A3
MPA	CHECK CONTR.	DAT.	99-01-04	Property of Eigenaam van	© FERROXCUBE 2000	