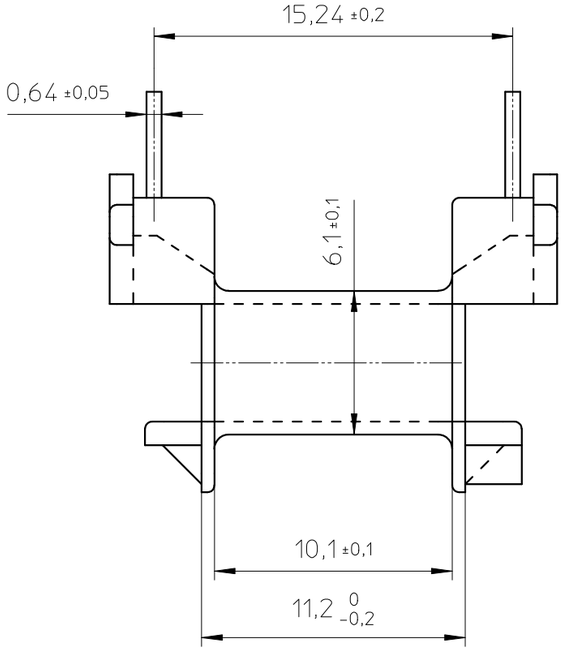

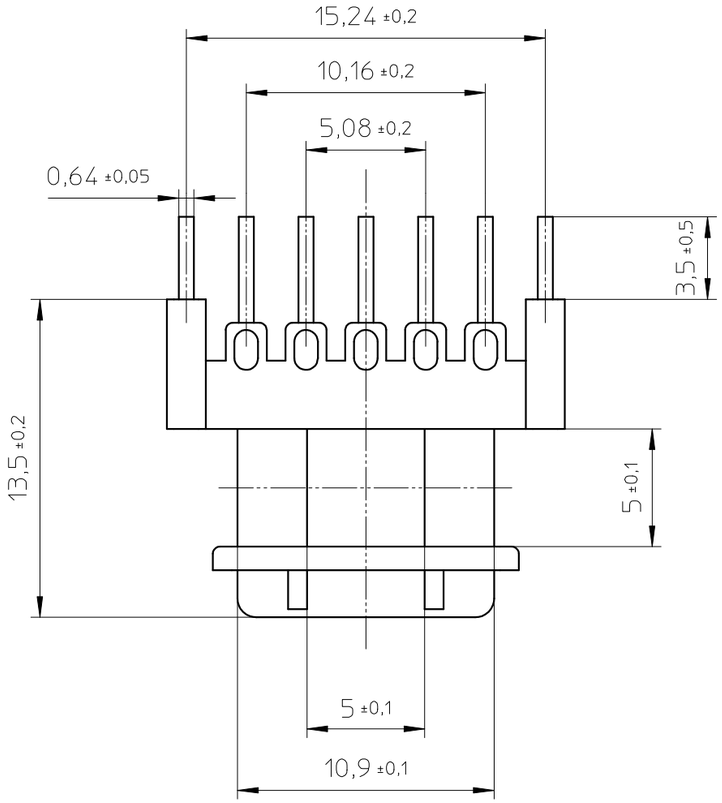

HOLE PATTERN

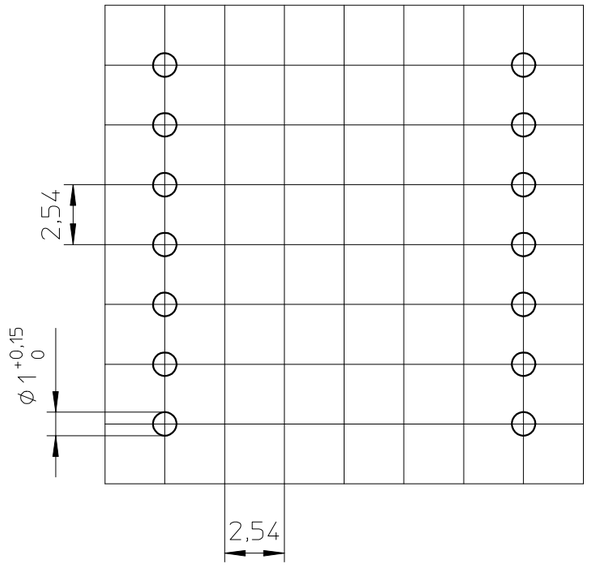

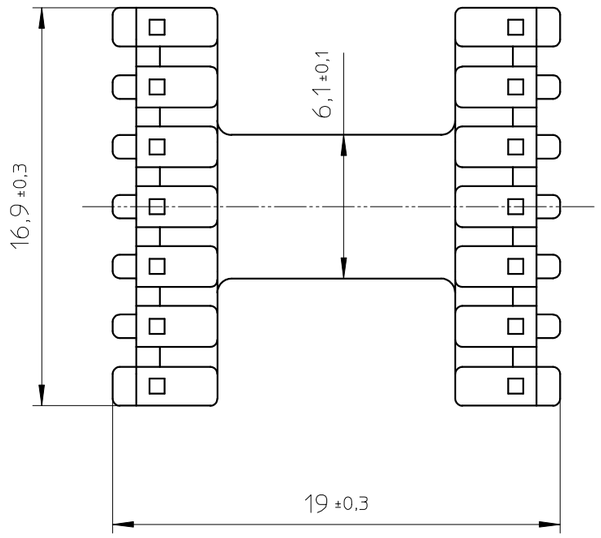



Coil former material:	Sumikon PM9820 (PF), glass-reinforced. UL file number: E41429 - UL94V-0.
Pin material:	Copper-clad steel, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
Min. winding area:	22 mm .
Mean length of turn:	33 mm.

CLASS.NO.	CSH-E16/8/5-1S-14P	4322 021 03921	~~2001-11-12~~ 2005-03-11
NAME NAAM: Tjon	SUPERS. VERV.	001 SH BL. SH BL. 112 – 001	A3
MPA CHECK CONTR.	DAT. 01-11-12	Property of Eigendom van © FERROXCUBE 2000	