

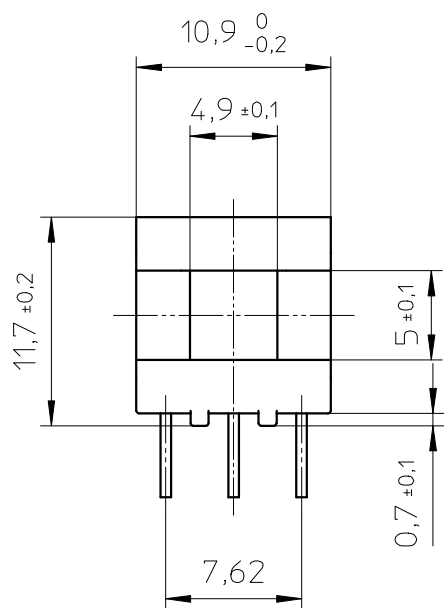
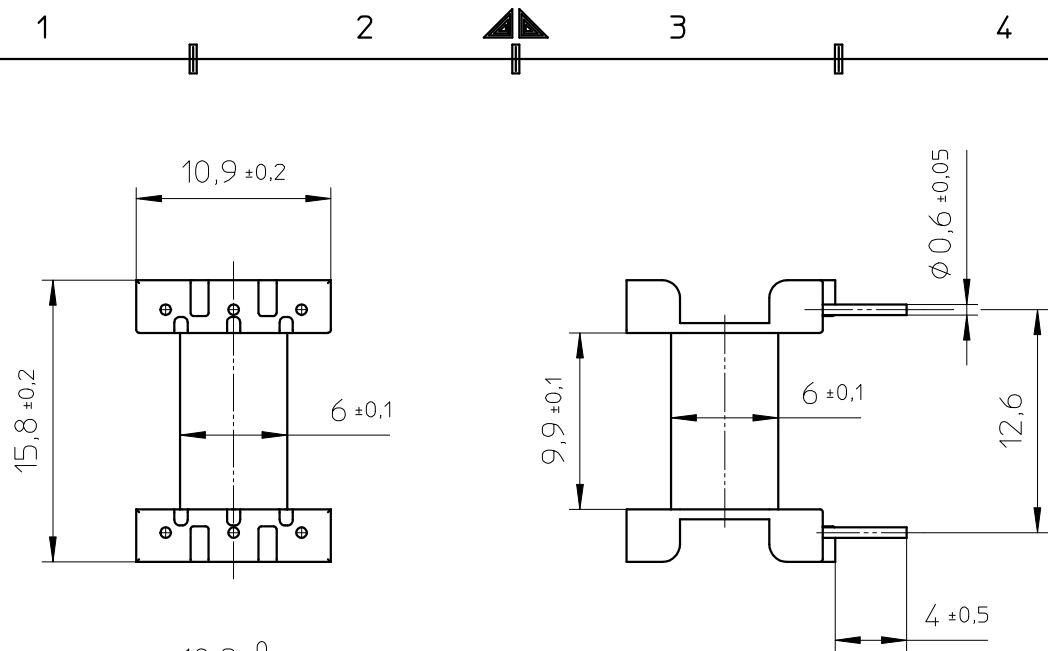




**FERROXCUBE**



Hole pattern:

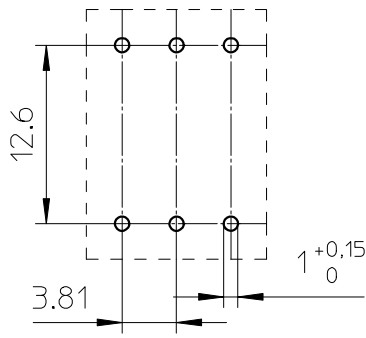

Coil former material: Sumikon PM-9820 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area: 22,5 mm<sup>2</sup>  
 Mean length of turn: 33,9 mm.

CLASS.NO.		CSH-E16/8/5-1S-6P-C		4322 021 04071		2002-03-28	
						2003-08-13	
						2003-08-13	
						2005-03-11	
NAME NAAM	Tjon	SUPERS. VERV.	1	SH BL.	112 - 001	010	A4
MPA	CHECK CONTR.	DAT.	02-03-28	Property of Eigendom van		© FERROXCUBE 2000	