

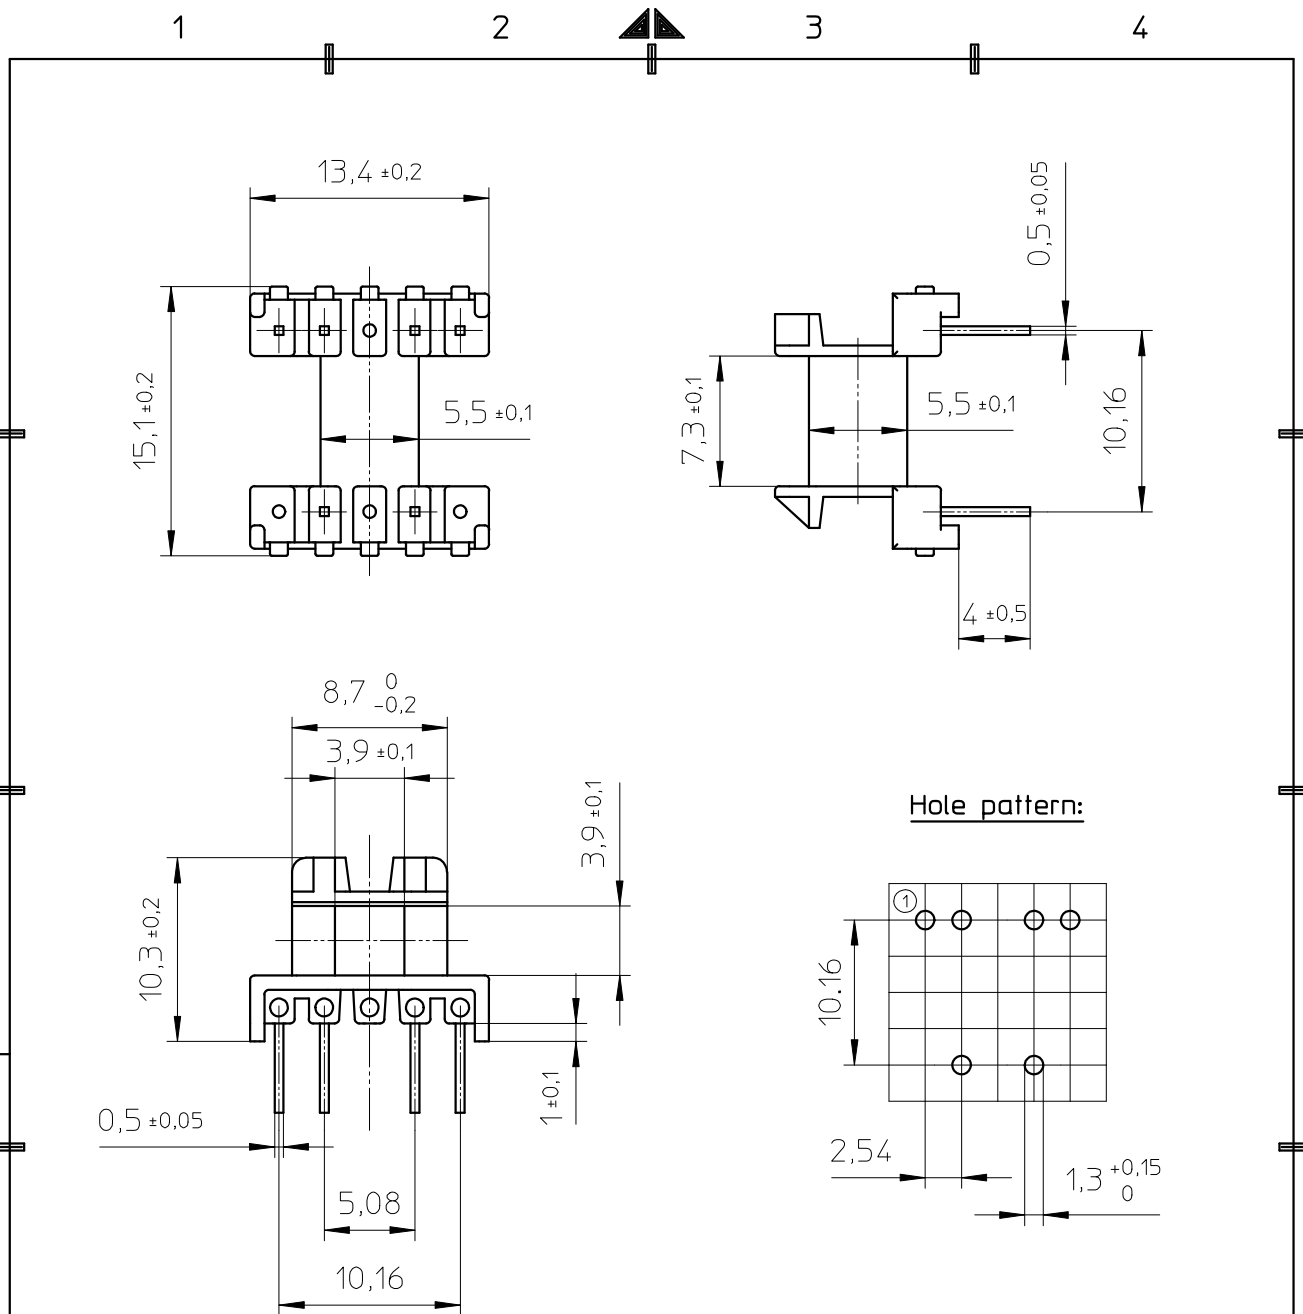




**FERROXCUBE**



Hole pattern:

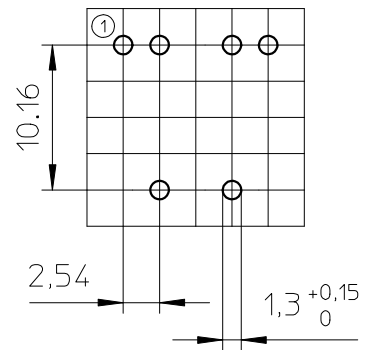

Coil former material: PM T355J (PF), glass-reinforced.  
 UL file number: E59481 - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area:  $10,4 \text{ mm}^2$   
 Mean length of turn: 29.6 mm.

CLASS.NO.		CSH-E13/7/4-1S-6P-C		4322 021 04151		2002-05-14 2005-03-11	
NAME NAAM	Tjon	SUPERS. VERV.	1	SH BL.	112	-	001 010
MPA	CHECK CONTR.	DAT.	02-05-14	Property of Eigendom van	© FERROXCUBE 2000		
						A4	