

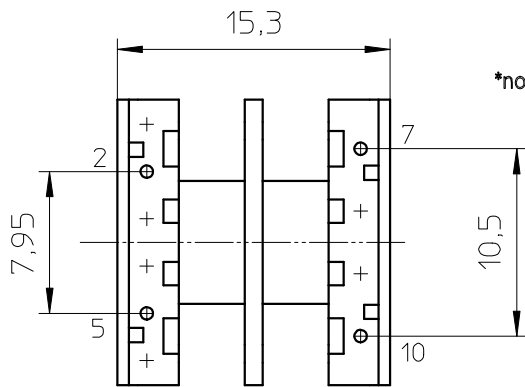


1 2 3 4

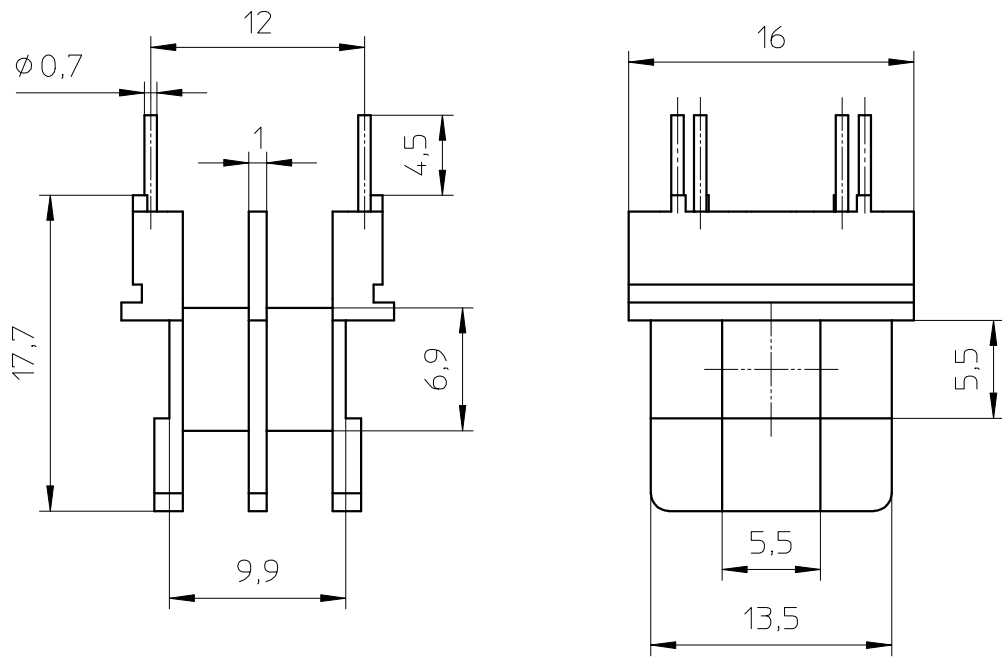

*note: 4 pins only on positions 2,5,7 & 10



Coil former material: PBT4130 (PBT), glass-reinforced.
 UL file number: E59481 - UL94-V0.
 Pin material: Copperclad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class B, 130°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.
 Min. winding area: 23,2 mm .
 Mean length of turn: 43,2 mm.

CLASS.NO.		CPH-E19/8/5-2S-4P-C		4322 021 04411		2003-01-15
						2005-03-08
NAME NAAM	Tjon	SUPERS. VERV.	8222 294 47991	1 SH BL	112 - 001	010
MPA	CHECK CONTR.	DAT.	03-01-15	Property of Eigendom van		© FERROXCUBE 2000
						A4