

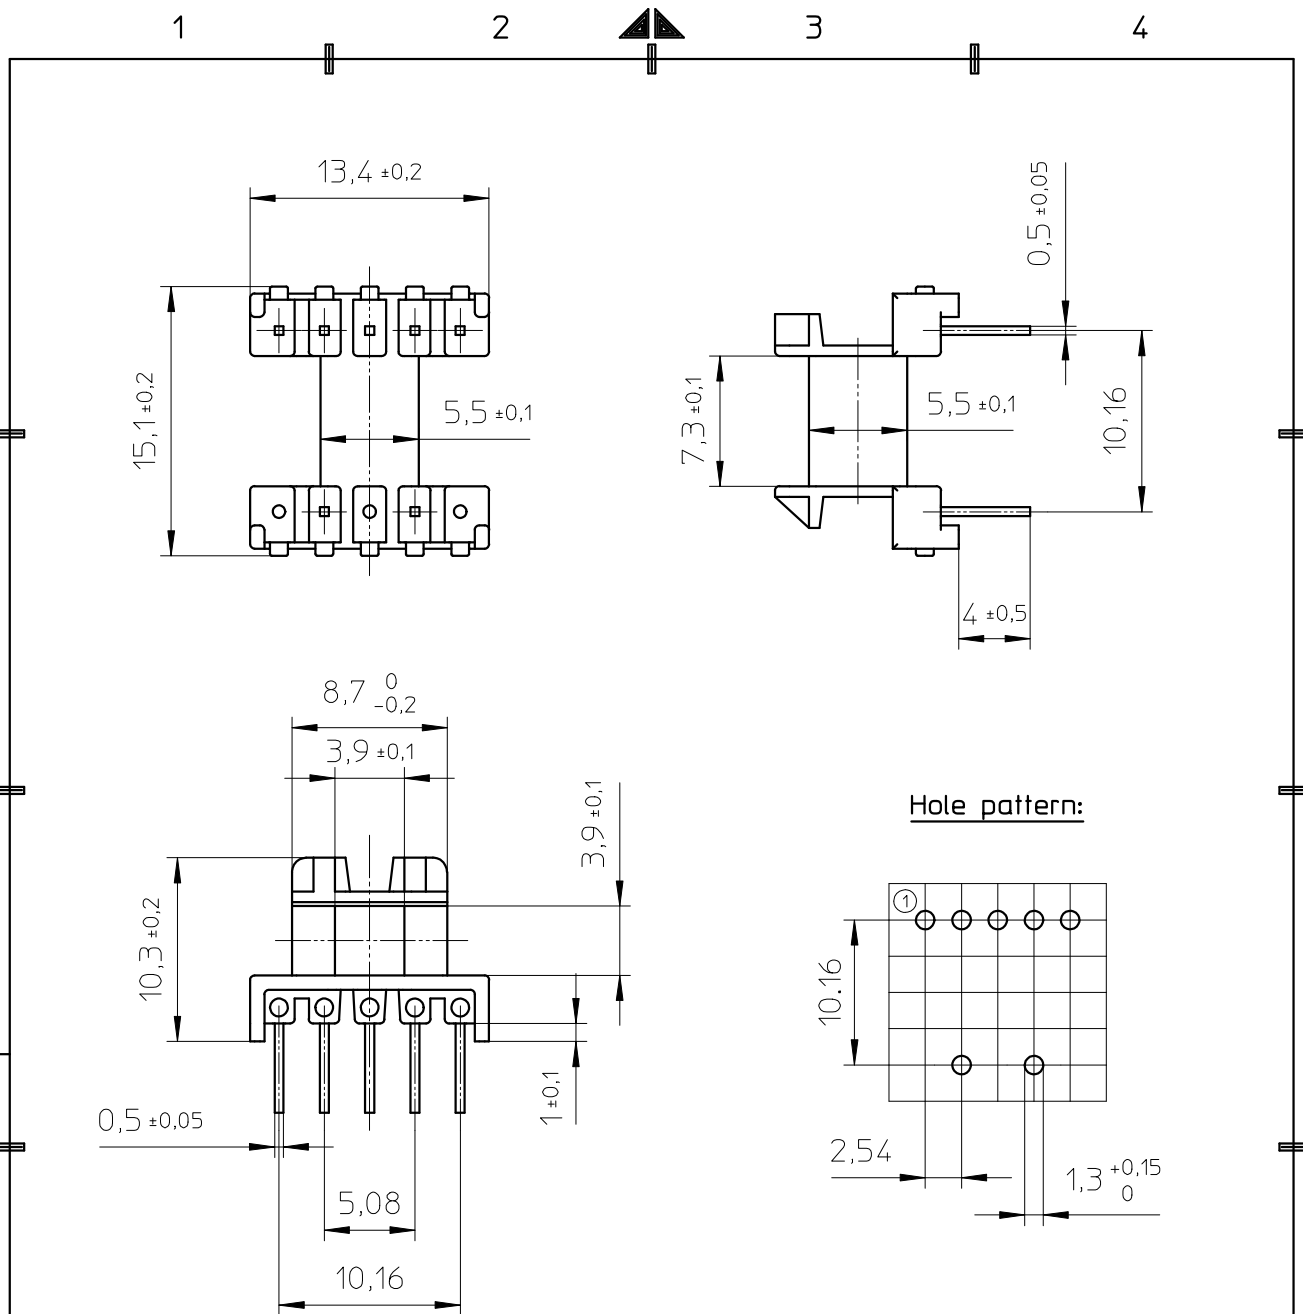



FERROXCUBE



Hole pattern:



Coil former material: PM T355J (PF), glass-reinforced.
 UL file number: E59481 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 10,4 mm²
 Mean length of turn: 29,6 mm.

CLASS.NO.		CSH-E13/7/4-1S-7P-C		4322 021 04421		2003-01-17	
						2005-03-11	
NAME NAAM	Tjon	SUPERS. VERV.	1	SH BL.	112	-	001
MPA	CHECK CONTR.	DAT.	03-01-17	Property of Eigendom van	© FERROXCUBE 2000		010
							A4