
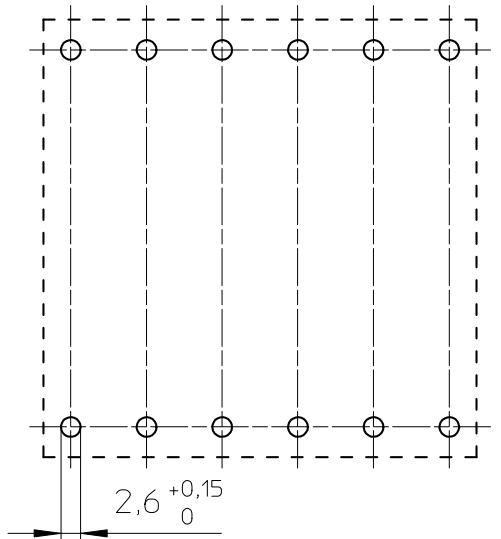


PROPOSED HOLE ARRANGEMENT:

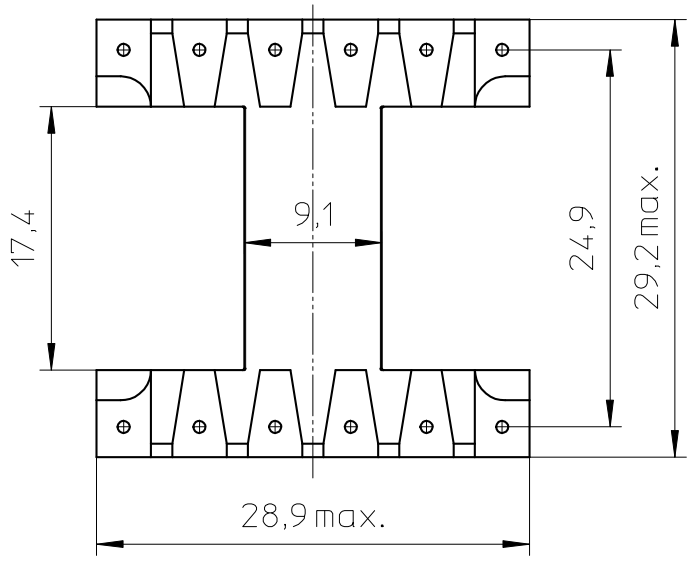

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.

Pin material: Copper-plated steel wire, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class H, 180°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 54 mm<sup>2</sup>

Mean length of turn: 56 mm.

CLASSNO.		CSH-E30/15/7-1S-12P-T		4322 021 04501		2003-06-19		
						2003-12-17		
						2004-06-04		
						2005-03-08		
						2008-06-19		
NAME NAAM	M.Tryngiel	SUPERS. VERV.		1 SH BL.	SH BL.	112 - 001	010	A4
MPA	CHECK CONTR.	DAT.	2003-06-19	Property of Eigendom van		© FERROXCUBE 2008		