


PROPOSED PAD ARRANGEMENT

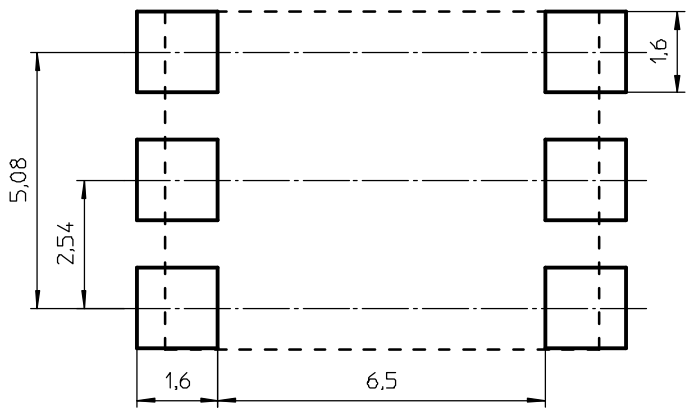

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705 - UL94V-0

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.

Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 1.6 mm<sup>2</sup>

Mean length of turn: 12.8 mm.

CLASS NO.		03-02-20	
CPHS-E6.3/2-1S-6P-Z		4322 021 06041	
NAME M.Veekens	SUPERS VERV.	1	SP BL 112 - 001
MPA	CHECK CONTR.	DATE 03-02-20	Property of Eigendom van © FERROXCUBE 2000
			069
			<b>A3</b>