
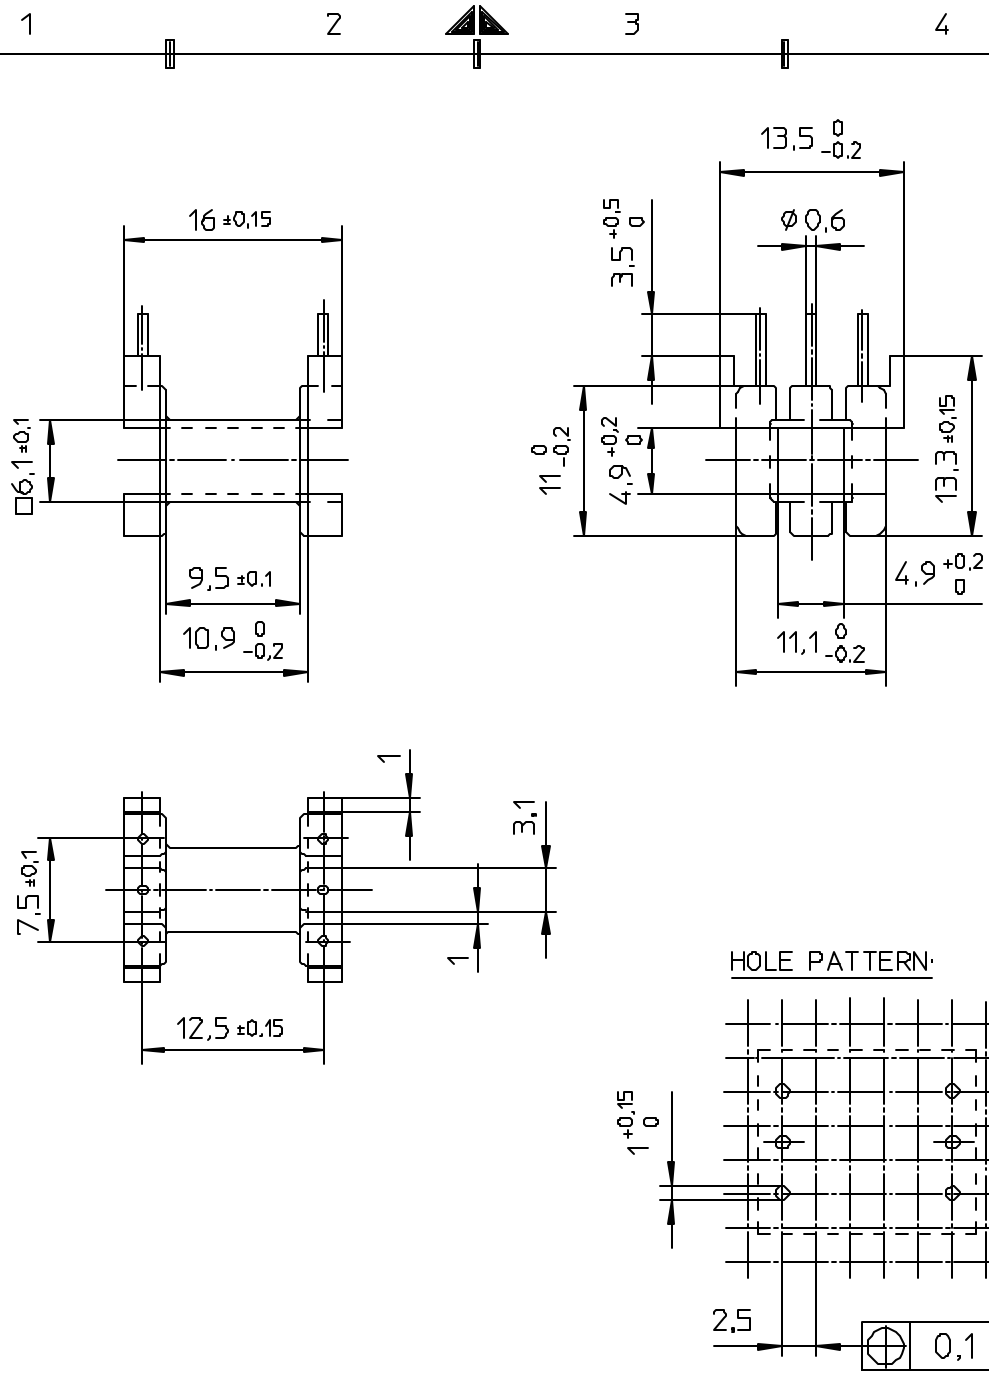



FERROXCUBE



Coil former material: Ultramide A3X2G5 (PA6.6), glass-reinforced.
 UL file number: E41871(M) - UL94V-0.
 Pin material: CuSn, Sn plated
 Max. operating temp.: acc. to IEC 85 class B, 130°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B. 350°C - 3,5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1. 235°C - 2sec
 Min. winding area: 21,6 mm².
 Mean length of turn: 33 mm.

CLASSNL			03-03-10
	CPH-E16/8/5-1S-6P-Z	4322 021 06271	

NAME NAAM	M Veekens	SUPERS VERV.		1 SH BL	SH BL	112 - 001	D10	A4
MPA	CHECK CONTR.	DAT	03-03-10	Property of Eigendom van	© FERROXCUBE 2000			