

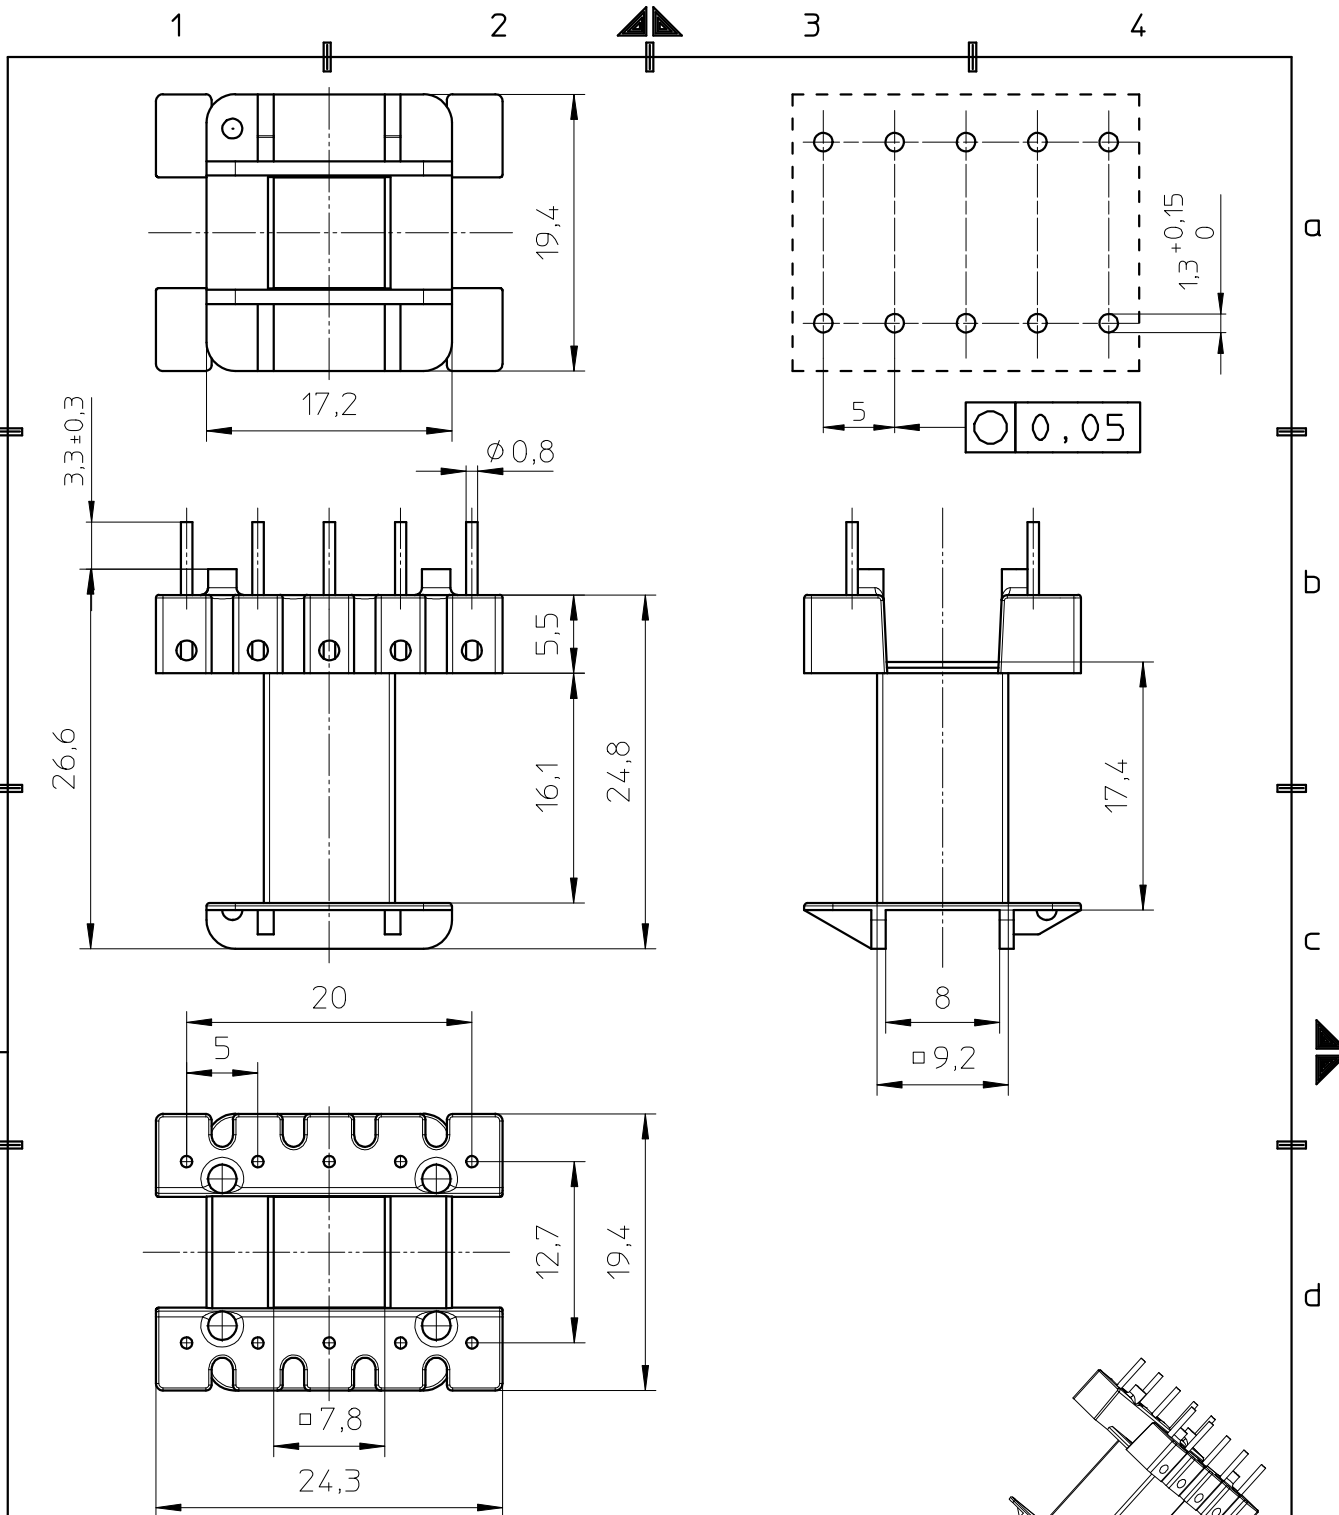



**FERROXCUBE**



Coil former material: Rynite FR530 (PET), glass-reinforced.  
 UL file number: E69578 - UL94V-0.  
 Pin material: Copperclad steel - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area: 64 mm.<sup>2</sup>  
 Mean length of turn: 52,8 mm.

CLASS.NO.			1	03-05-2005
	CPV-E25/13/7-1S-10P-Z	4322 021 06421		
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL. 112 - 001 010
MPA	CHECK CONTR.	DAT.	03-05-2005	Property of Eigendom van © FERROXCUBE 2000

A4