
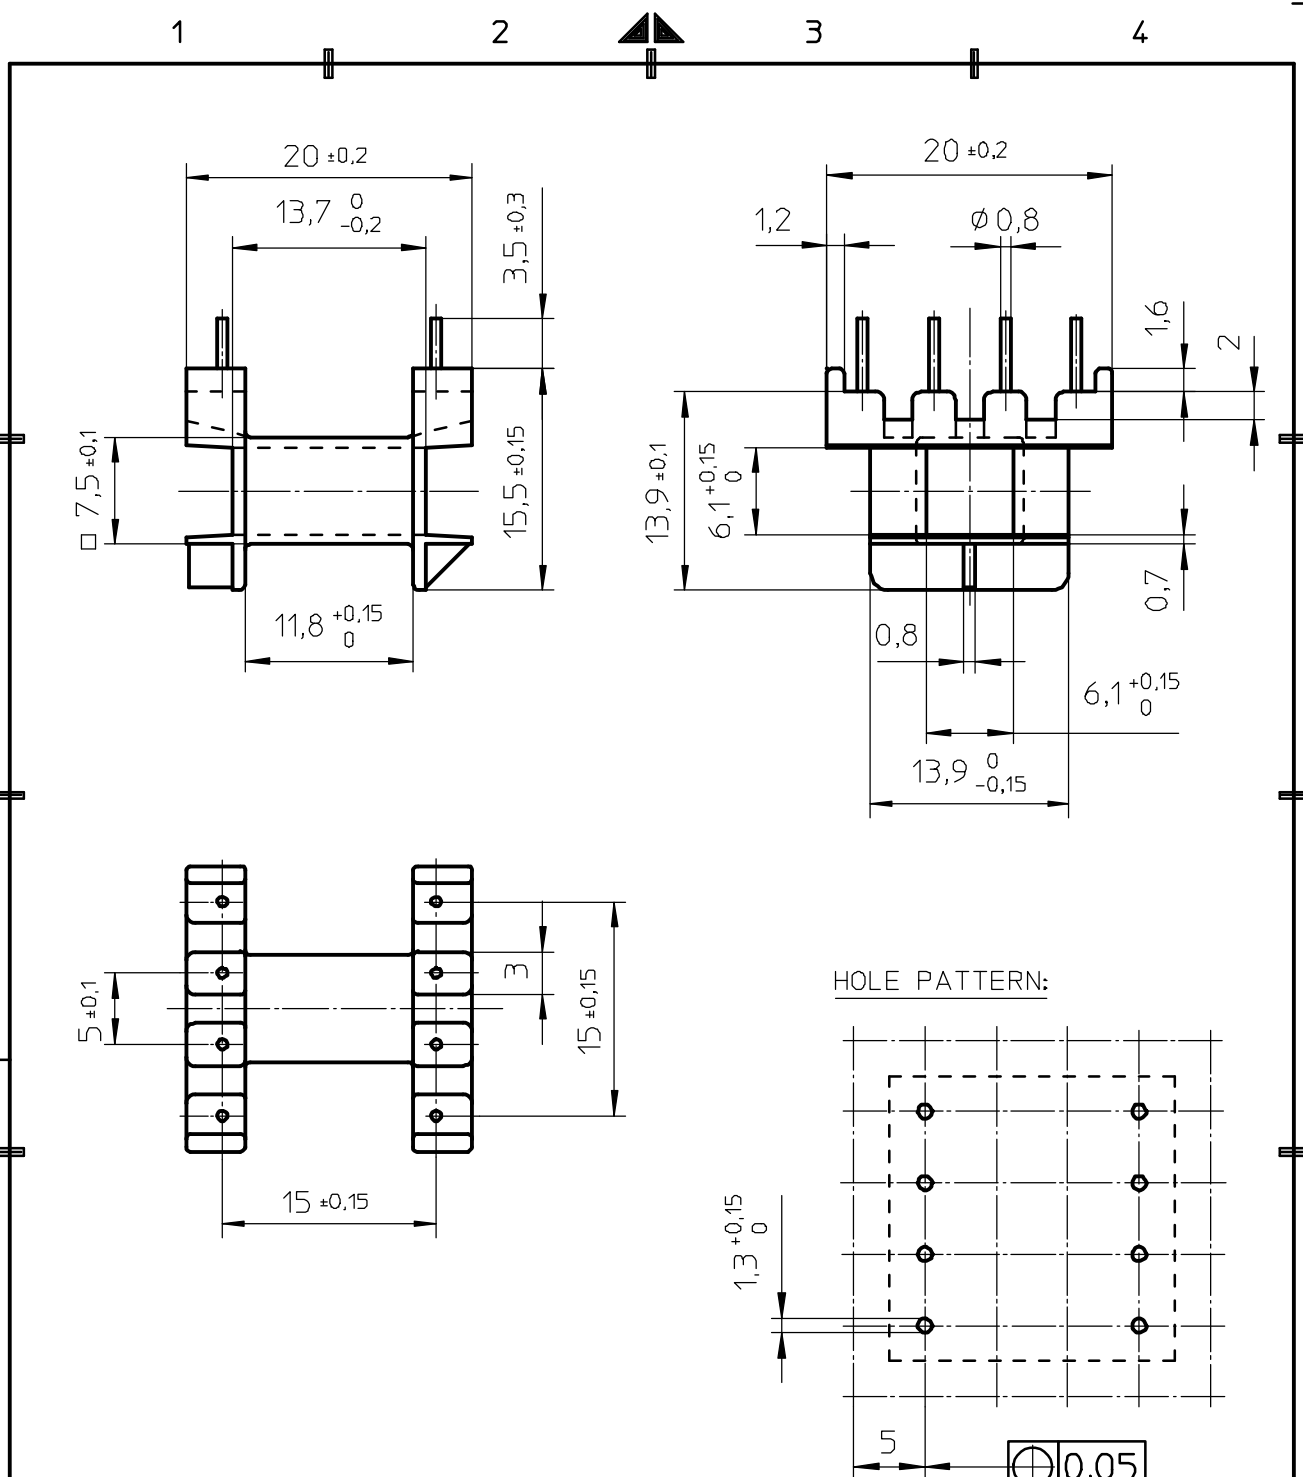



**FERROXCUBE**



HOLE PATTERN:

Coil former material : Ultramide A3X2G5 (PA6.6), glass-reinforced.  
 Ul file number: E41871 - UL94V-0.  
 Pin material : CuSn6 , Sn plated.  
 Max. operating temp. : 130°C class B.  
 Resistance to soldering heat : 350°C-2sec.  
 Solderability : IEC 60 068-2-20 Part 2, Test Ta, method 1.  
 Winding area : 34,8 mm.<sup>2</sup>  
 Mean length of turn : 39 mm.

CLASS NO.		CPH-E20/10/6-1S-8P	4312 021 26212	91-06-21
				91-09-13
				99-10-06
				02-07-05
				2004-09-28
NAME NAAM	M.Veekens	SUPERS. VERV.	1 SH BL	112 - 001 010
MPA	CHECK CONTR.	DAT.	91-06-21	Property of Eigendom van © FERROXCUBE 2000

**A4**