

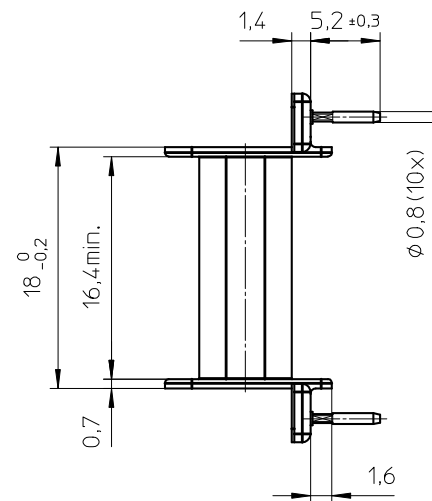
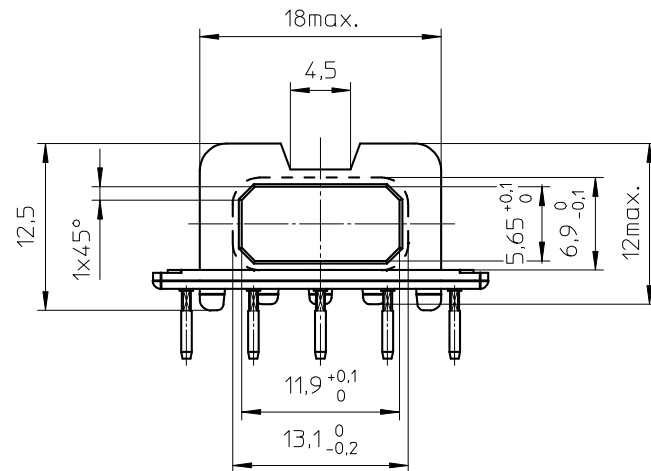


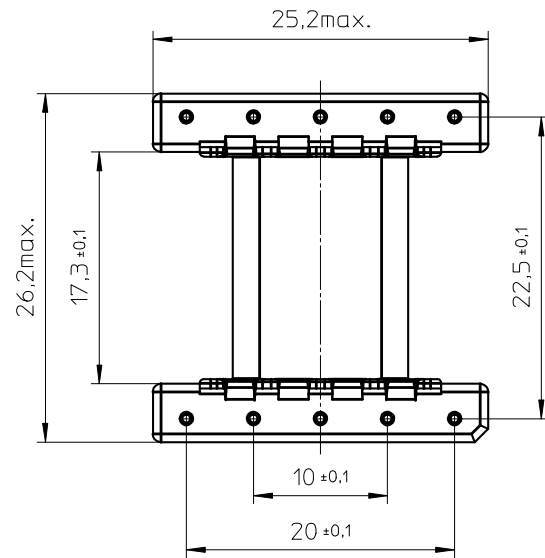

HOLE PATTERN:

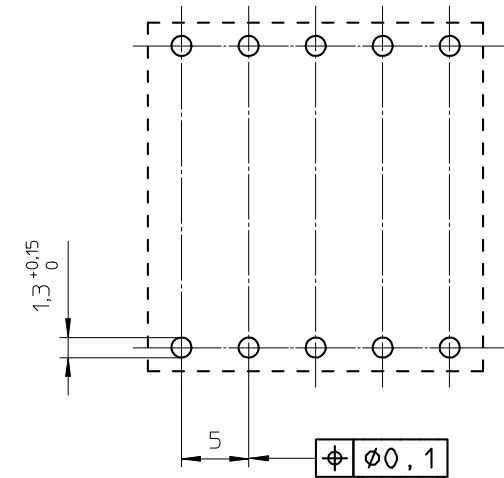

Coil former material:

Sumikon PM-9630 (PF), glass-reinforced.

Pin material:

CuSn - Ni flash, Sn plated.

Max. operating temp.:

acc. to IEC 60 085 class H, 180°C.

Resistance to soldering heat:

acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability:


acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area:

40 mm².

Mean length of turn:

46 mm.



CLASSNO.		CSH-EFD25-1S-10P-IZ				4322 021 06941				07-11-09	
										2-08-2011	
07-11-09											
NAME NAAM		M.Trynqiel				SUPERS. VERV.		001		SH BL	
MPA		CHECK CONTR.		DAT.		07-11-09		Property of Eigendom van		© FERROXCUBE 2007	
								112 - 001		069	
										A3	