
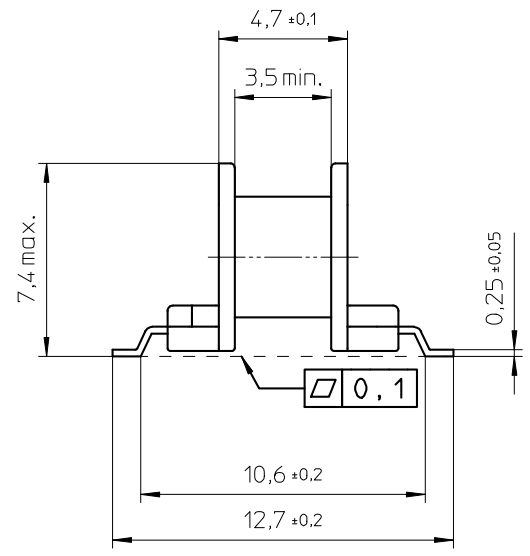


PROPOSED PAD ARRANGEMENT:

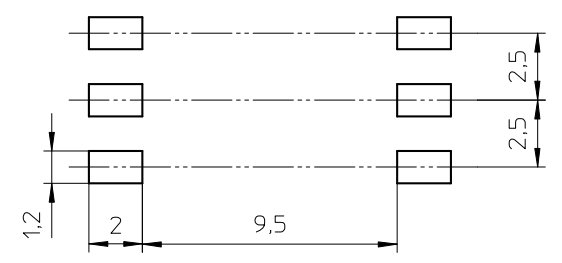

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705 - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.


Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area: 4,02 mm<sup>2</sup>.

Mean length of turn: 18,0 mm.



CLASSNO.		CPHS-EP7-1S-6P-T		4322 021 04021		2002-02-25
						2005-03-11
						2007-11-09
NAME NAAM	A.Wojtasz	SUPERS. VERV.	001	SPSH BL	112 - 001	069
MPA	CHECK CONTR.	DAT.	02-01-25	Property of Eigenaam van	© FERROXCUBE 2000	
						A3