



PROPOSED PAD ARRANGEMENT:

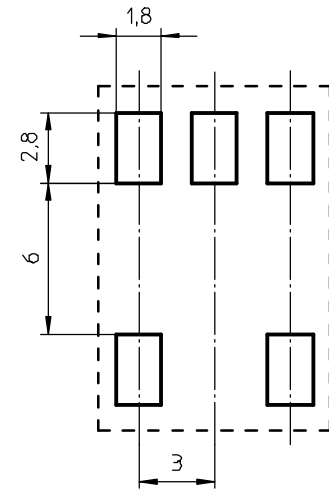

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.   
 Pin material: CuSn - Ni flash. Sn plated.  
 Max operating temp.: acc. to IEC 85 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.  
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
 Min. winding area: 4,56 mm<sup>2</sup>.  
 Mean length of turn: 17,9 mm.

CLASS NO.		CSHS-EP7-1S-5P-Z		4322 021 06351		1 03-06-03	
NAME	M. Veekens	SUPPERS	001	SP	112 - 001	069	A3
MPA	CHECK	DATE	2003-06-03	Property of		© FERROXCUBE 2000	
	CONTR.			Eigendom van			