




c




d

e

f

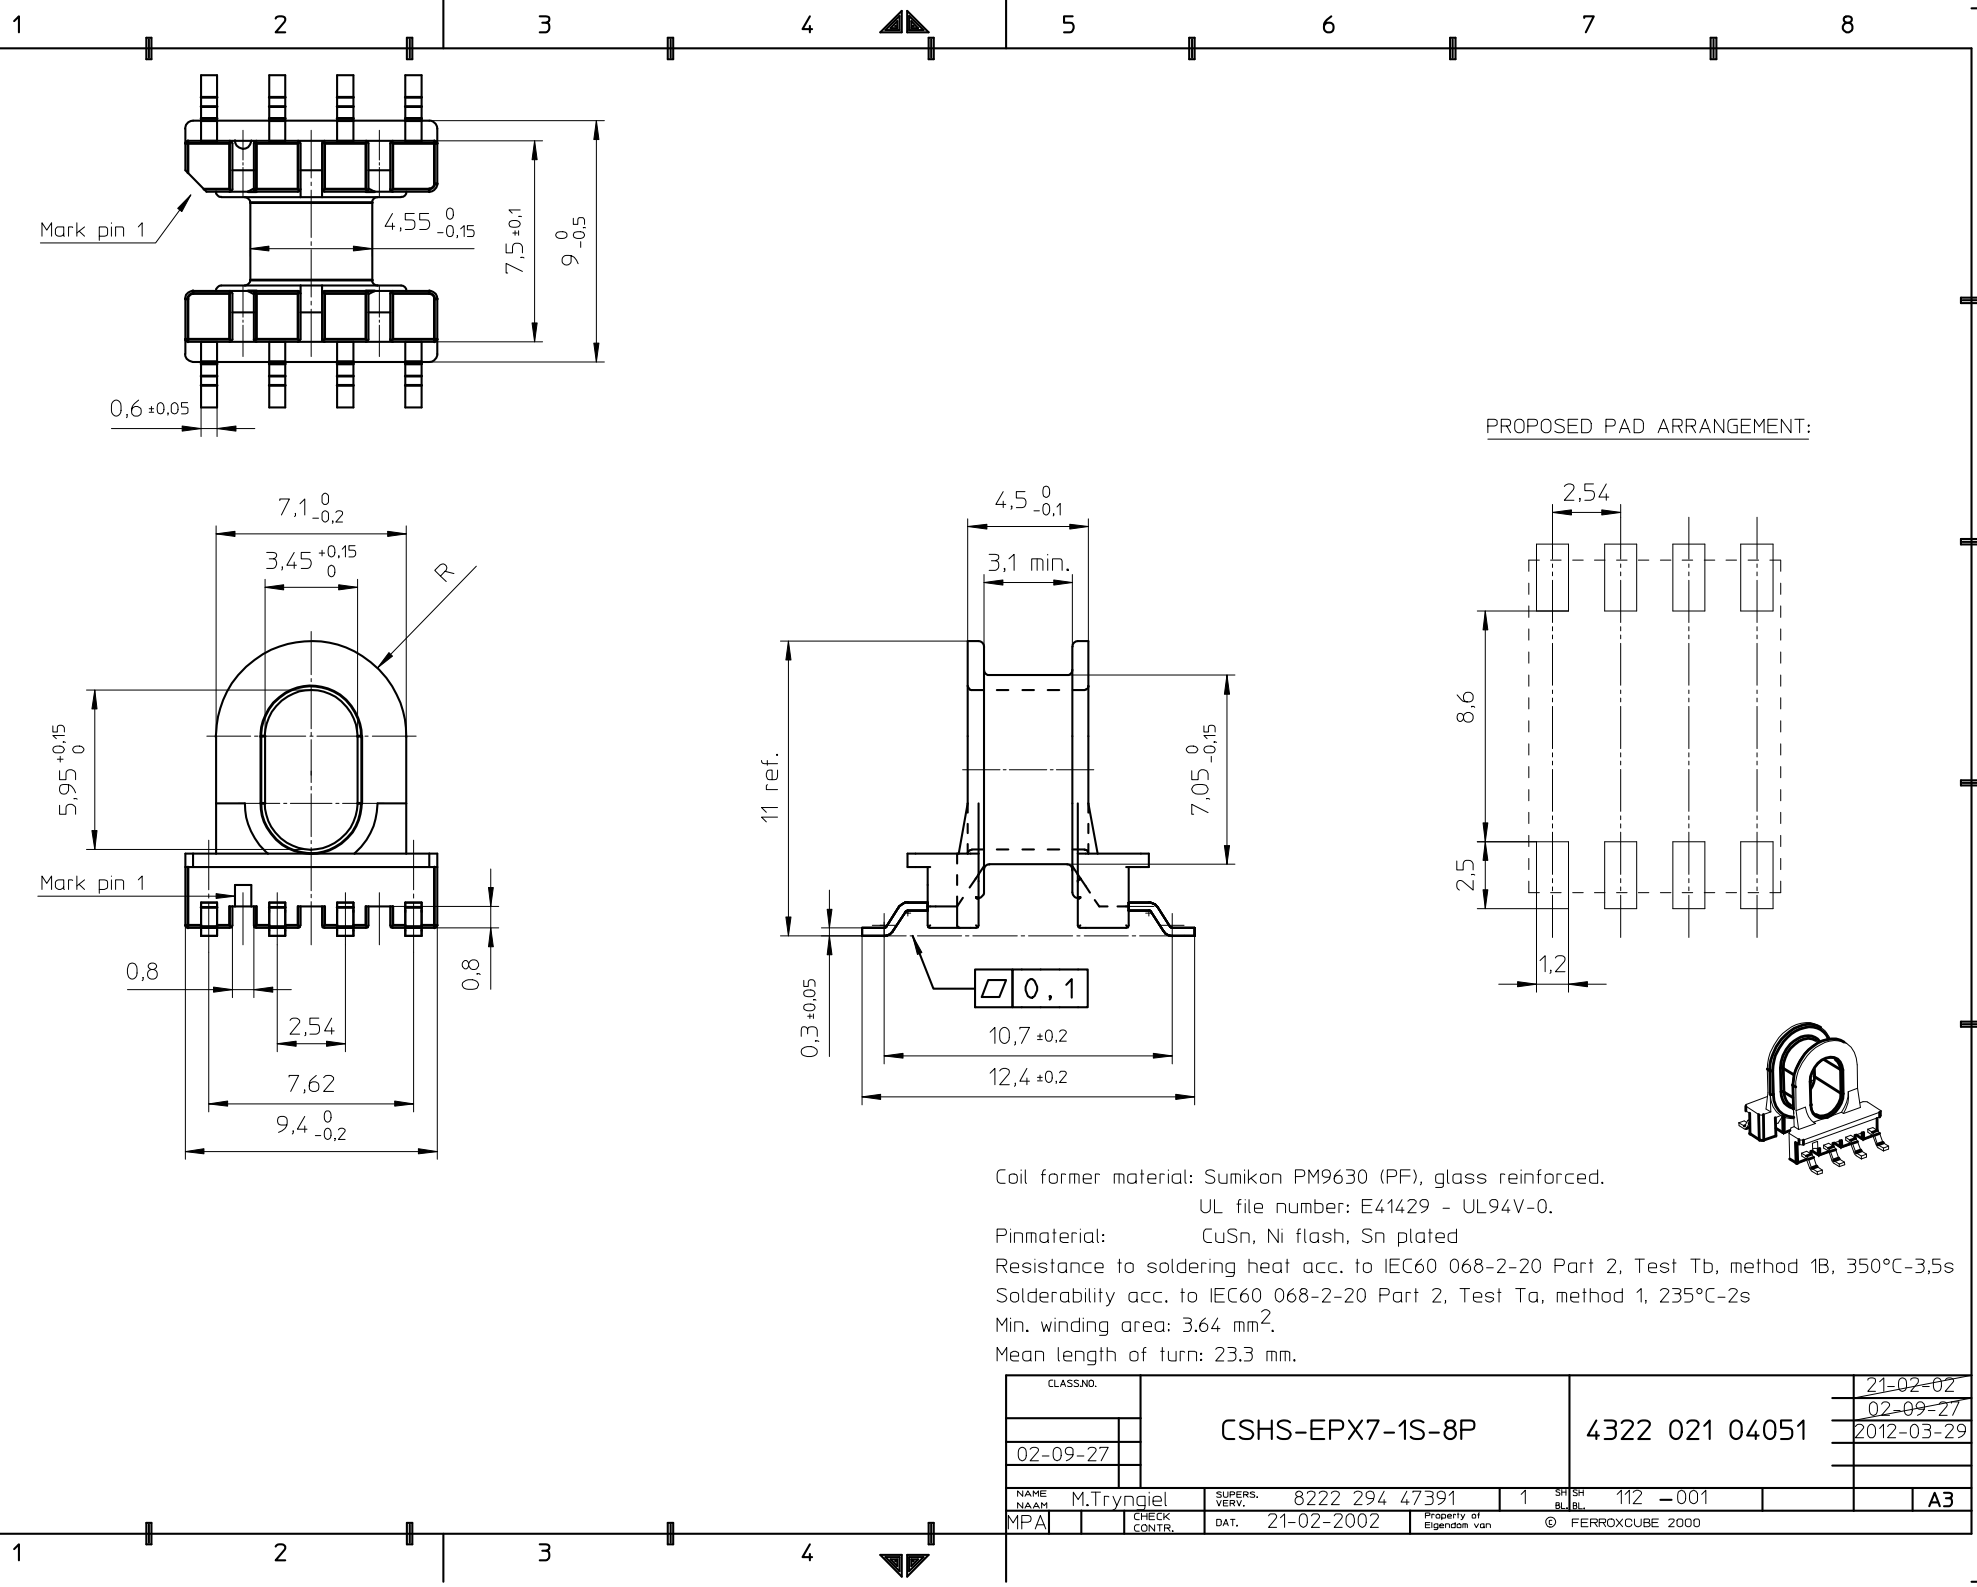

PROPOSED PAD ARRANGEMENT:



Coil former material: Sumikon PM9630 (PF), glass reinforced.
 UL file number: E41429 - UL94V-0.
 Pinmaterial: CuSn, Ni flash, Sn plated
 Resistance to soldering heat acc. to IEC60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s
 Solderability acc. to IEC60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 3.64 mm^2 .
 Mean length of turn: 23.3 mm.

CLASSNO.		CSHS-EPX7-1S-8P		4322 021 04051		21-02-02
						02-09-27
02-09-27						2012-03-29
NAME NAAM	M.Trynqiel	SUPERS. VERV.	8222 294 47391	1	SPSH BL	112 -001
MPA	CHECK CONTR.	DAT.	21-02-2002	Property of Eigenaam van	© FERROXCUBE 2000	
						A3