


PROPOSED PAD ARRANGEMENT:

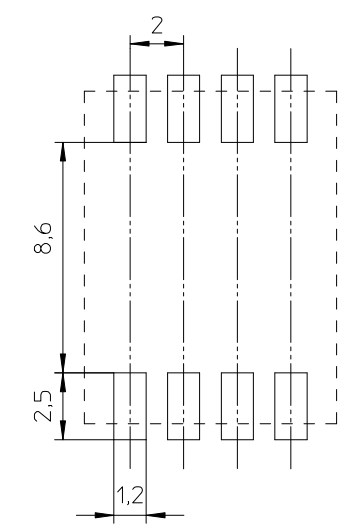

Coil former material: Sumikon PM9630 (PF), glass reinforced.

UL file number: E41429 - UL94V-0.


Pinmaterial: CuSn, Ni flash, Sn plated

Resistance to soldering heat acc. to IEC60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability acc. to IEC60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area: 3.64 mm².

Mean length of turn: 23.3 mm.



CLASSNO.		CSHS-EPX7-1S-8P-T		4322 021 04161		02-05-14
02-09-27						02-09-27
02-09-27						2012-03-29
NAME NAAM	M.Trynkiel	SUPERS. VERV.	8222 294 47441	1	SPSH BL/BL	112 - 001
MPA	CHECK CONTR.	DAT.	14-05-2002	Property of Eigenaam van	© FERROXCUBE 2000	
						A3