


PROPOSED PAD ARRANGEMENT:

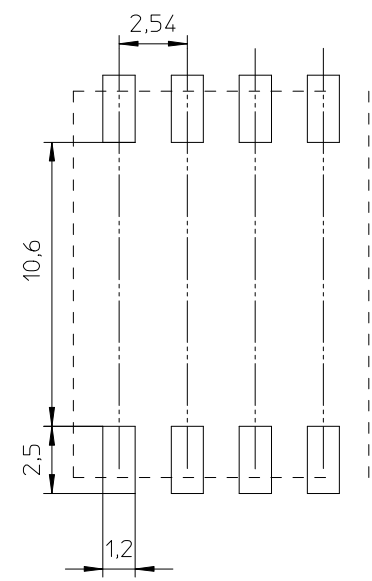

Coil former material: Sumikon PM9630 (PF), glass reinforced.

UL file number: E41429 - UL94V-0.


Pinmaterial: CuSn, Ni flash, Sn plated

Resistance to soldering heat acc. to IEC60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability acc. to IEC60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area:  $5,99 \text{ mm}^2$ .

Mean length of turn: 23.3 mm.



CLASSNO.		CSHS-EPX9-1S-8P		4322 021 04171		02-05-14
2002-09-27						02-09-27
NAME NAAM		M.Tryngiel		1		SPSH BL/BL
CHECK CONTR.		DAT. 14-05-2002		Property of Eigendom van		A3
				© FERROXCUBE 2000		