





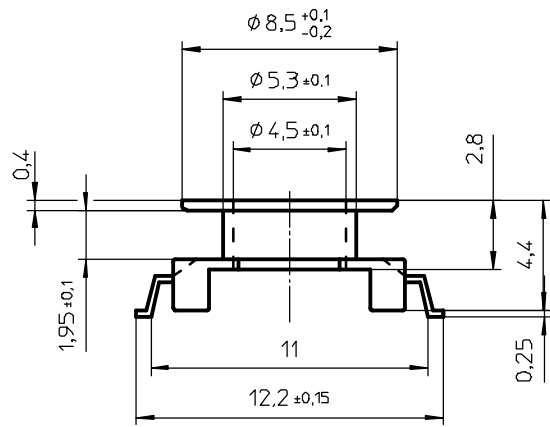

1 2 3 4 5 6 7 8

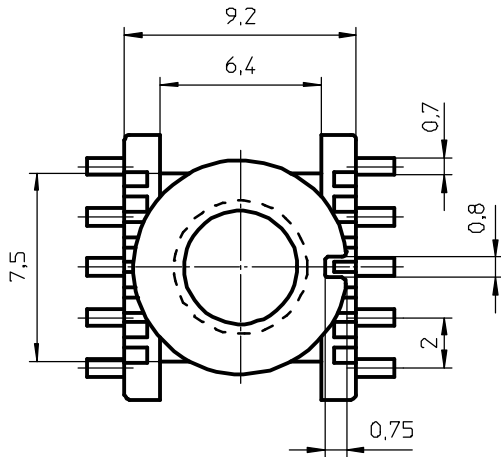

PROPOSED PAD ARRANGEMENT:

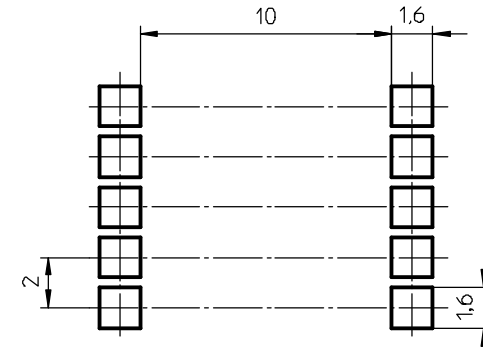

- Coil former material: Sumikasuper E4008 (LCP), glass-reinforced, UL file number: E54705 - UL94V-0
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60085 class F, 155°C.
- Resistance to soldering heat: acc. to IEC 60068-2-20 Test Ta, method 1B, 350°C - 3.5sec.
- Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min. winding area: 2.8 mm².
- Mean length of turn: 21.6 mm.

CLASS NO.		CPVS-ER11-1S-10P-Z		4322 021 06141		03-02-20	
NAME	M. Veekens	SUPERS	1	SP	112 - 001	069	A3
MPA	CHECK CONTR.	DATE	03-02-20	Property of	© FERROXCUBE 2000		

1 2 3 4