

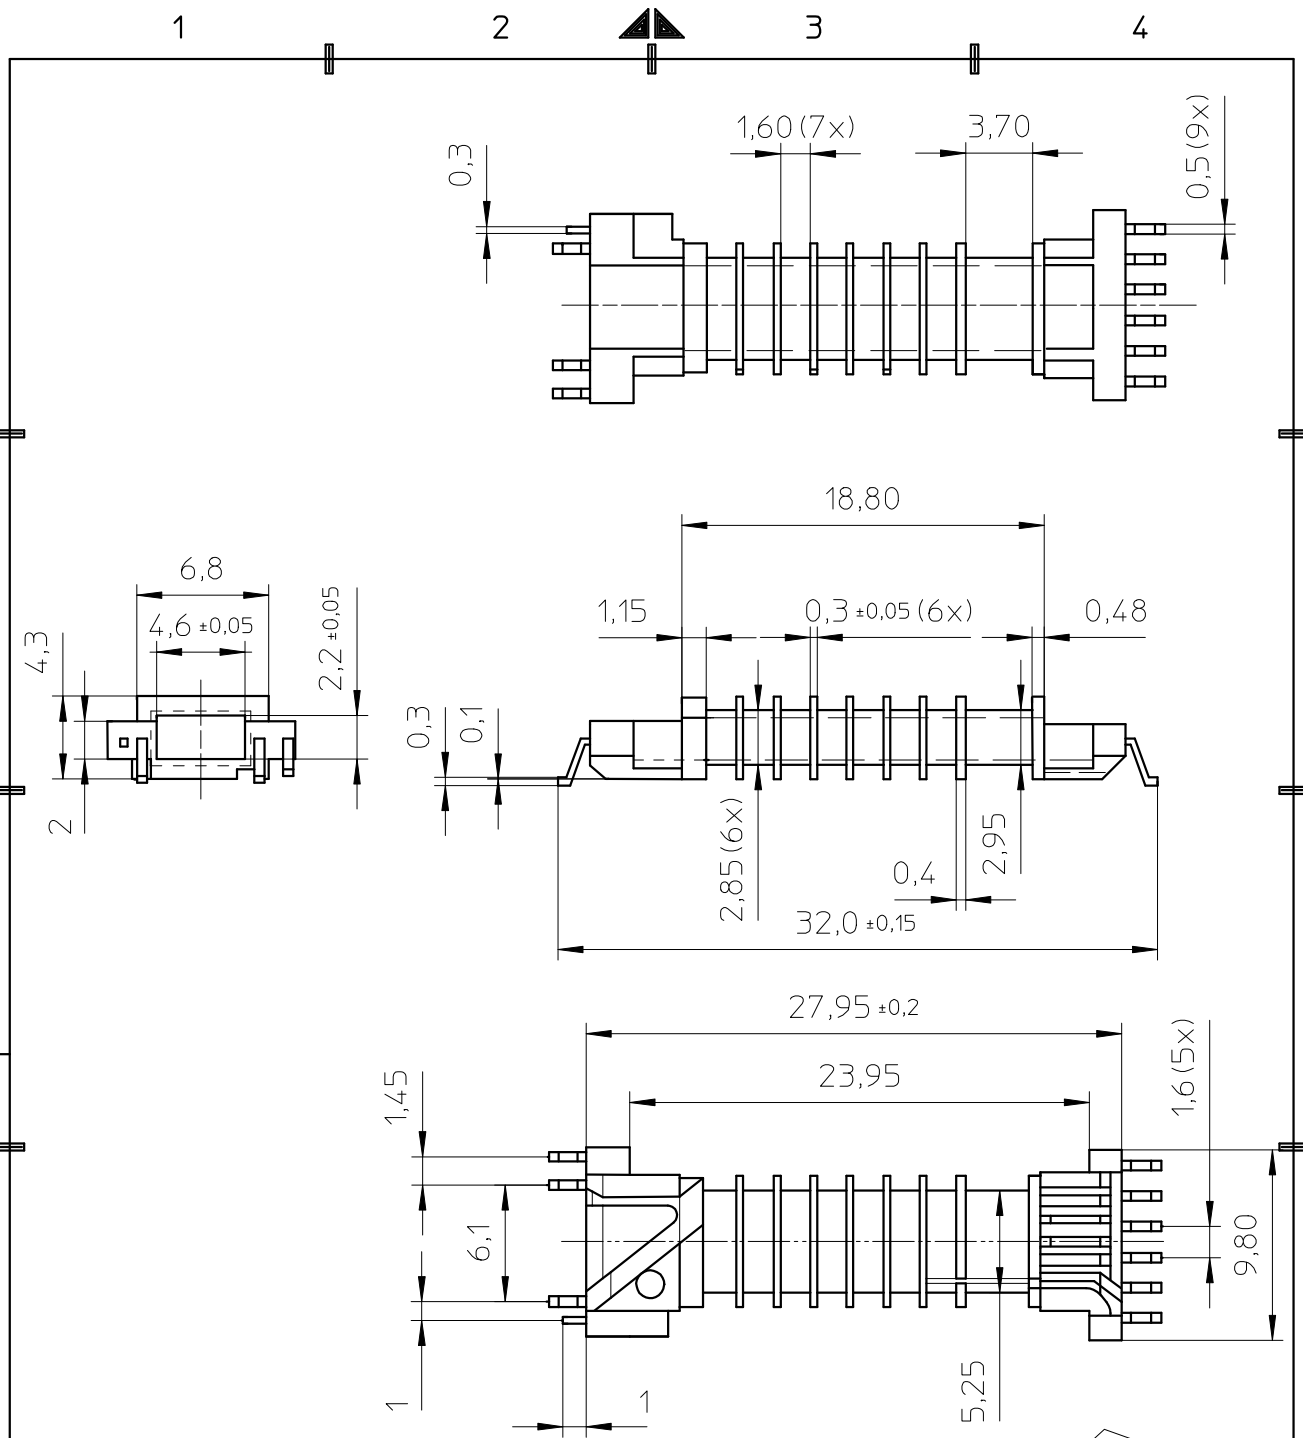



FERROXCUBE



Coil former material:

Sumikasuper E4008 (LCP), glass-reinforced.

Pin material:

UL file number: E54705 - UL94V-0.

Max. operating temp.:

CuSn, Ni flash, Sn plated (matte finish)

Resistance to soldering heat:

acc. to IEC 60 085 class F, 155°C.

Solderability:

acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.

Min. winding area:

acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Mean length of turn:

$2,9 + 7 \times 1,24 \text{ mm}^2$

17,3 mm.

CLASS.NO.		CPHS-FRM24/10-8S-9P		8222 294 48411		06-09-08	
						06-09-21	
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL.	112	-	001 010
MPA	CHECK CONTR.	DAT.	06-09-08	Property of Eigendom van		© FERROXCUBE 2000	
						A4	