


General data 6-pins P26/16 coil former for PCB mounting

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41938(M)
Maximum operating temperature	130 C, "IEC 60085", class B
Pin material	copper-zinc alloy (CuZn), tin (Sn) plated
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 C, 2 s

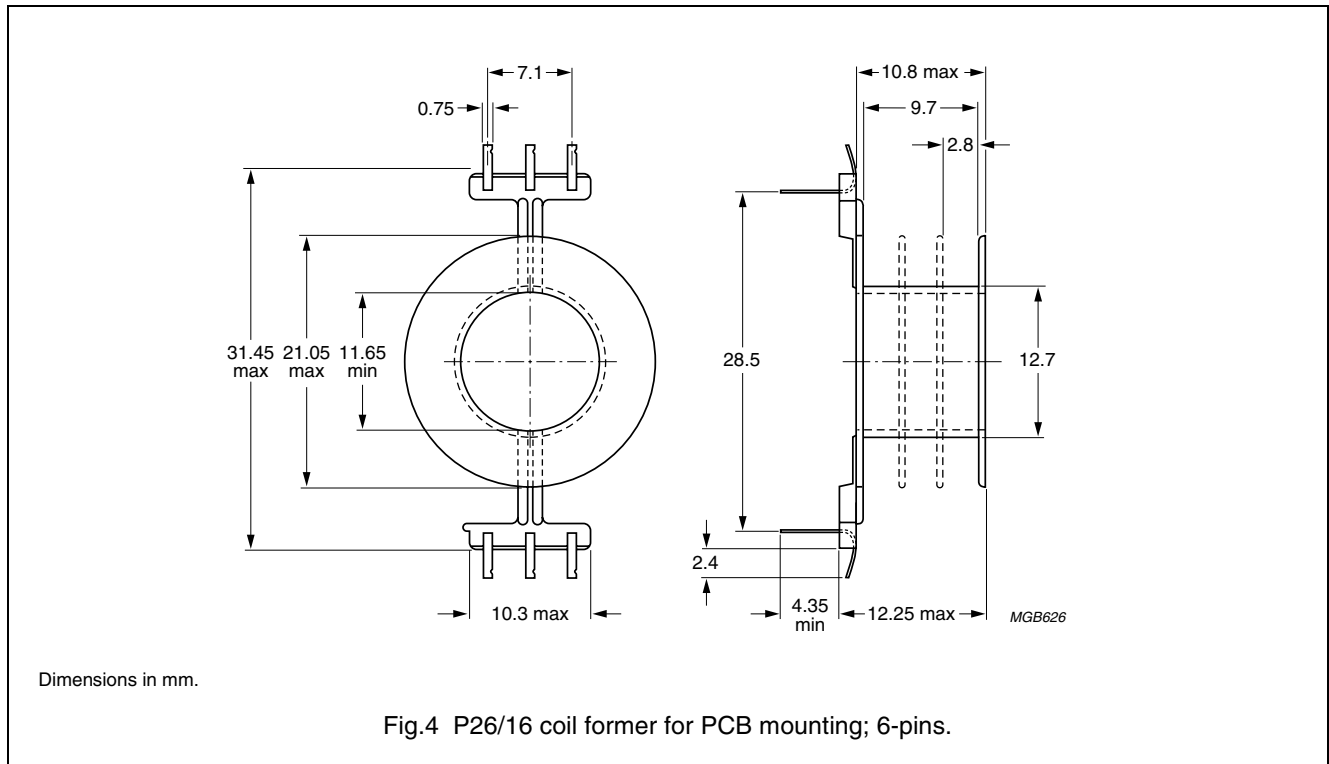

Data for 6-pins P26/16 coil former for PCB mounting

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm ²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	MINIMUM LENGTH OF PINS (mm)	TYPE NUMBER
1	36.7	9.7	52.7	4.4	CPV-P26/16-1S-6PD-Z
1	36.7	9.7	52.7	6.8	CPV-P26/16-1S-6PDL-Z
2	2 16.6	2 4.5	52.7	4.4	CPV-P26/16-2S-6PD-Z
2	2 16.6	2 4.5	52.7	6.8	CPV-P26/16-2S-6PDL-Z
3	3 10.3	3 2.8	52.7	4.4	CPV-P26/16-3S-6PD ⁽¹⁾ -Z
3	3 10.3	3 2.8	52.7	6.8	CPV-P26/16-3S-6PDL ⁽¹⁾ -Z

Note

- In accordance with "UL 94-HB".