



c



d





e

f



1 2 3 4 5 6 7 8

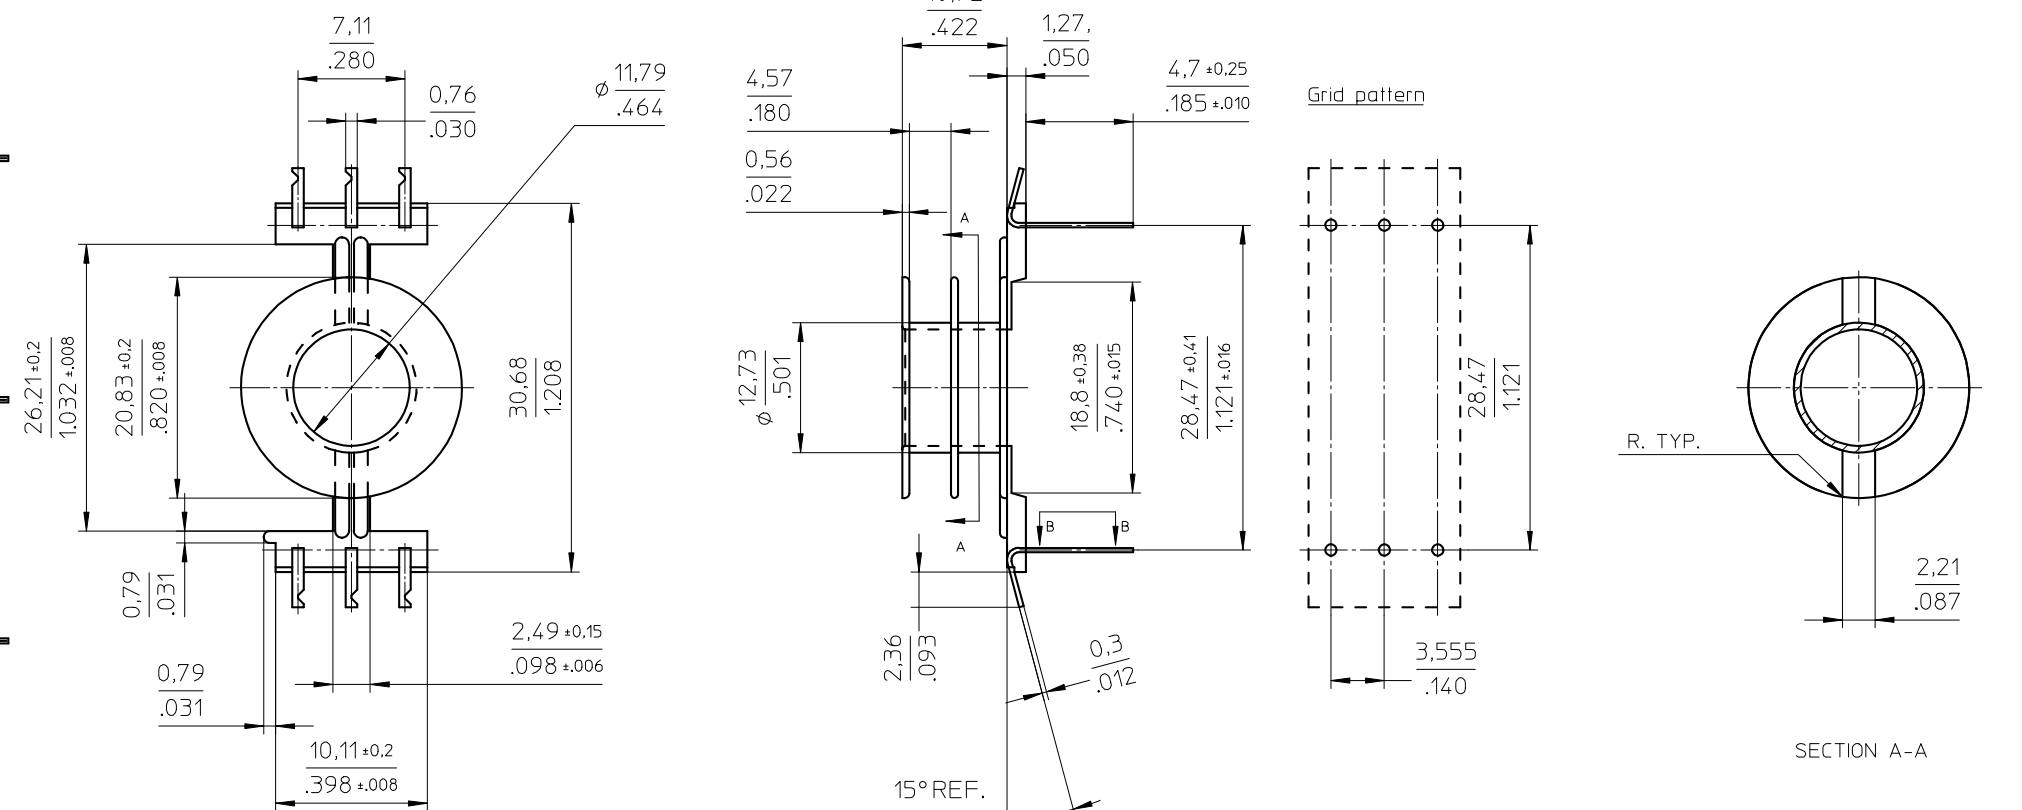

Coil former material: Zytel FR50 (PA6.6), glass-reinforced.  
 UL file number: E41938 - UL94V-0.  
 max. operating temp: 130°C, class B  
 pin material: brass, Ni flash, Sn plated.  
 solderability: acc. to IEC 60 068-2-20 part2, Test Ta method 1, 235°C-2sec.  
 mean length of turn: 2.075 inch (52.7 mm)  
 winding area: 0.028 sq. inch (18 mm<sup>2</sup>) per sect.

Dimensions [  $\frac{\text{mm}}{\text{inch}}$  ]

CLASSNO.		CPV-P26/16-2S-6PD-Z		4335 060 26601		06-01-30	
NAME NAAM		Wojtasz		SUPERS. VERV.		07-12-19	
CHECK CONTR.		DAT.		Property of Eigendom van		A3	
MPA		06-01-30		SPSH BL BL		112 - 001	
© FERROXCUBE 2000							