



FERROXCUBE



c




d



e

f



1

2

3

4

5

6

7

8

a

b

c

d

e




f

a


b

c

d

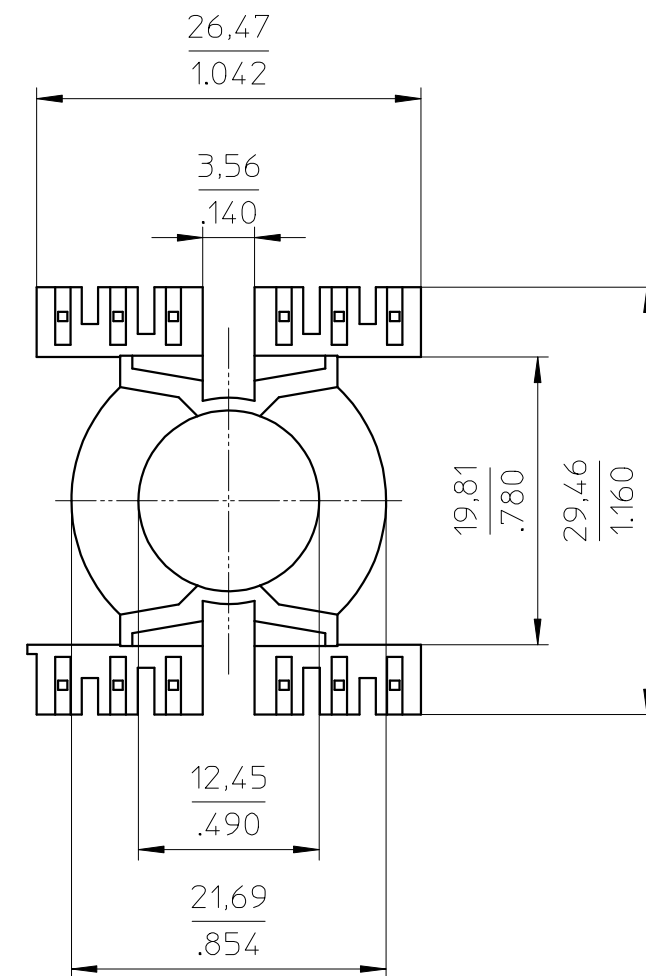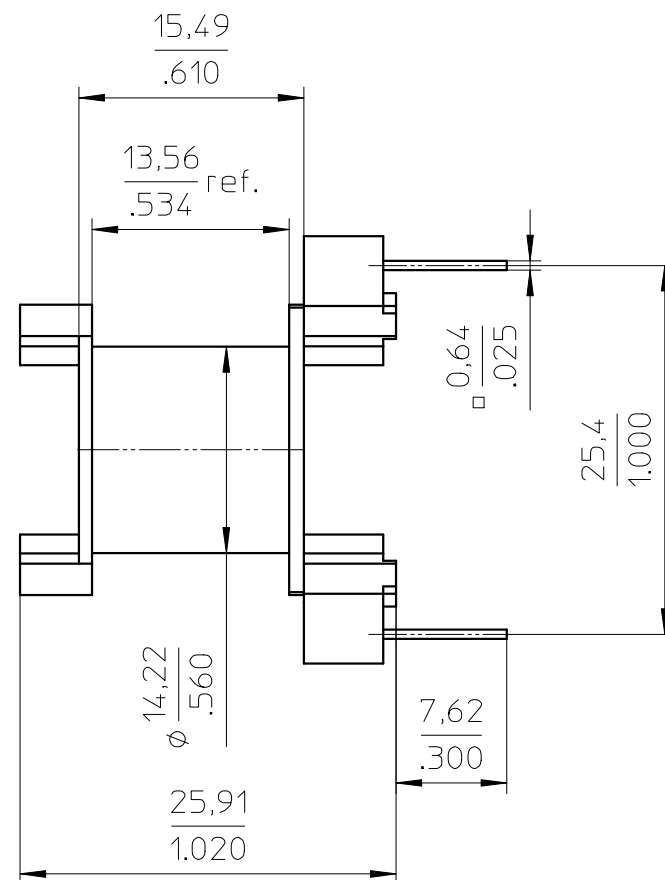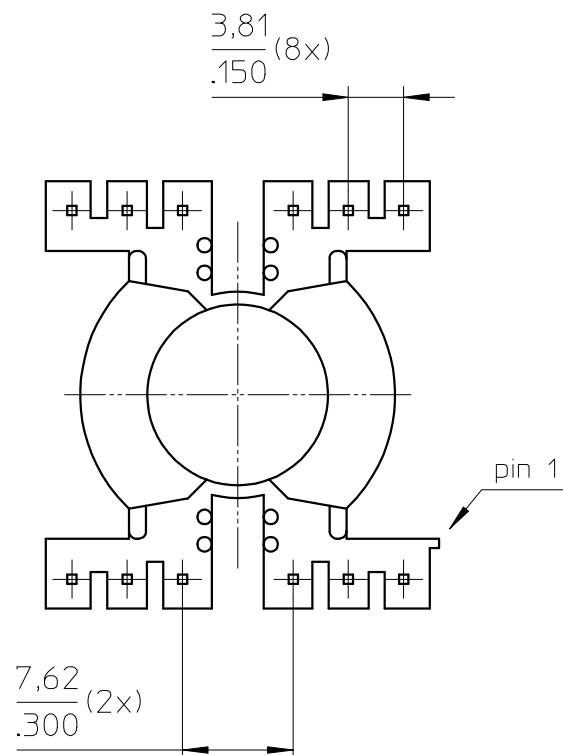

Grid pattern

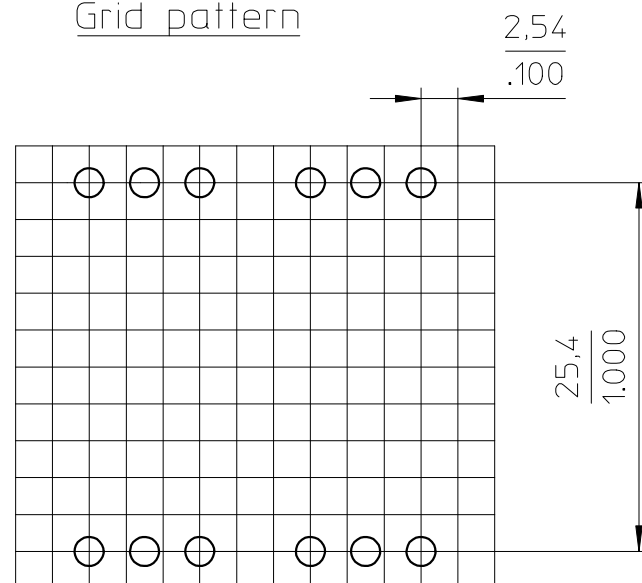

Coil former material: Rynite FR530 (PET), glass-reinforced, (color black).
 UL file number: E41938 - UL94V-0.
 max. operating temp: 180°C, class H
 pin material: Copper-plated steel wire, Sn plated.
 solderability: acc. to IEC 60 068-2-20 part2, Test Ta method 1, 235°C-2sec.
 mean length of turn: 2.221 inch
 winding area: .079 sq. inch.

CLASS.NO.	CPV-PQ26/25-1S-12P-Z		4335 060 26771	06-02-22
NAME NAAM	A.Wojtasz	SUPERS. VERV.	SH SH BL BL	A3
MPA	CHECK CONTR.	DAT.	06-02-22	Property of Eigendom van
			© FERROXCUBE 2000	