
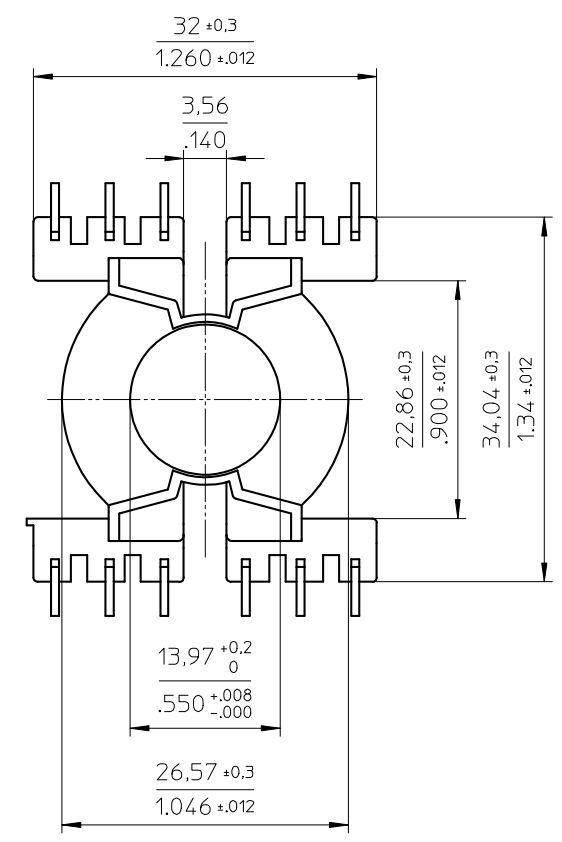
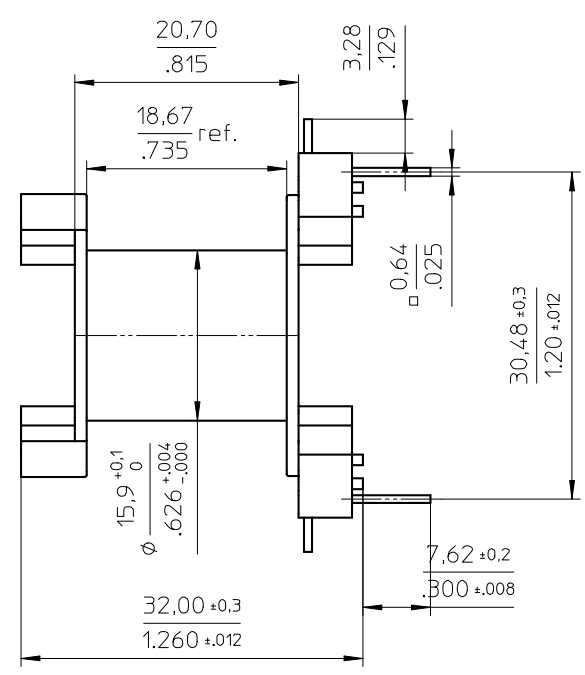


Grid pattern

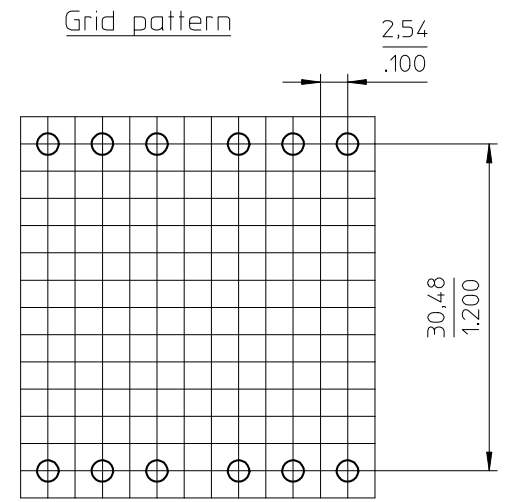

Coil former material: Rynite FR530 (PET), glass-reinforced, (color black).  
 UL file number: E41938 - UL94V-0.  
 max. operating temp: 180°C, class H  
 pin material: Copper-plated steel wire, Sn plated.  
 solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec.  
 mean length of turn: 2.626 inch  
 winding area: 0.154 sq. inch.

CLASSNO.		CPV-PQ32/30-1S-12PD-Z		4335 060 26821		06-02-22
						10-08-25
						2011-05-9
NAME NAAM	M.Trynqiel	SUPERS. VERV.		SPRSH BL/BL		A3
MPA	CHECK CONTR.	DAT.	06-02-22	Property of Eigenaam van	© FERROXCUBE 2000	