


HOLE PATTERN:

Space requirement 5x5 pitch.

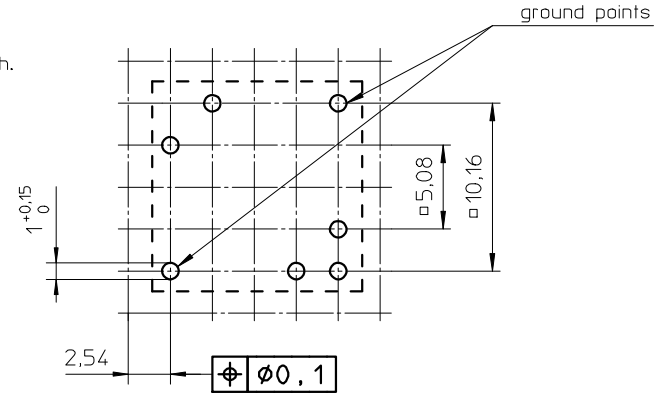

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.  
 UL file number: E61040 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 9,2 mm<sup>2</sup>.  
 Mean length of turn: 24,9 mm.

CLASSNO.	CSV-RM5-1S-5P		4322 021 34461	90-11-01
00-05-01				00-08-01
				01-04-24
				03-06-30
				05-09-01
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SP BL
MPA	CHECK CONTR.	DAT.	98-01-26	Property of Eigendom van
				© FERROXCUBE 2000
				112 - 001
				010
				<b>A3</b>