


HOLE PATTERN:
Space requirement 8x8 pitch.



Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
 UL file number: E61040 - UL94V-0.
 Pin material: CuSn - Ni flash (thickness ~2µm), Sn plated (thickness 5-10µm)
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 30 mm².
 Mean length of turn: 42 mm.

CLASS.NO.	00-08-01	
	02-04-04	
	04-09-28	
	05-09-01	
	07-02-27	
00-05-09	CSV-RM8-1S-8P-G	4322 021 01401
NAME NAAM MPA	A.Wojtasz	SUPERS. VERV. BL/BL
CHECK CONTR.	DAT. 95-05-18	1 112 - 001 010
	Property of Eigendom van	© FERROXCUBE 2000

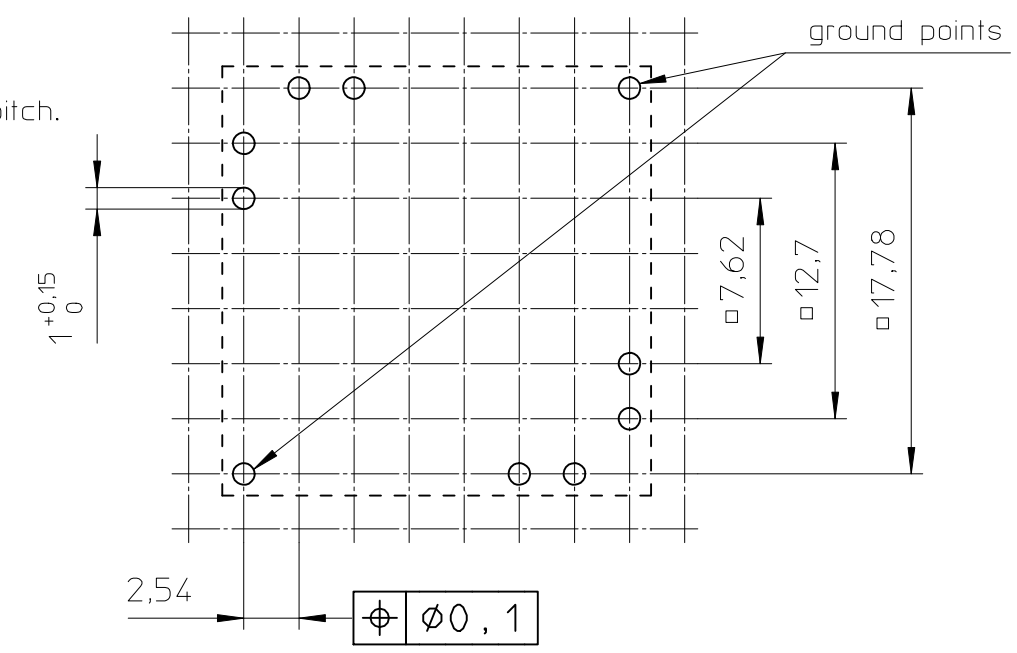