



**FERROXCUBE**



c




d



e

f



1

2

3


4

5


6

7


8

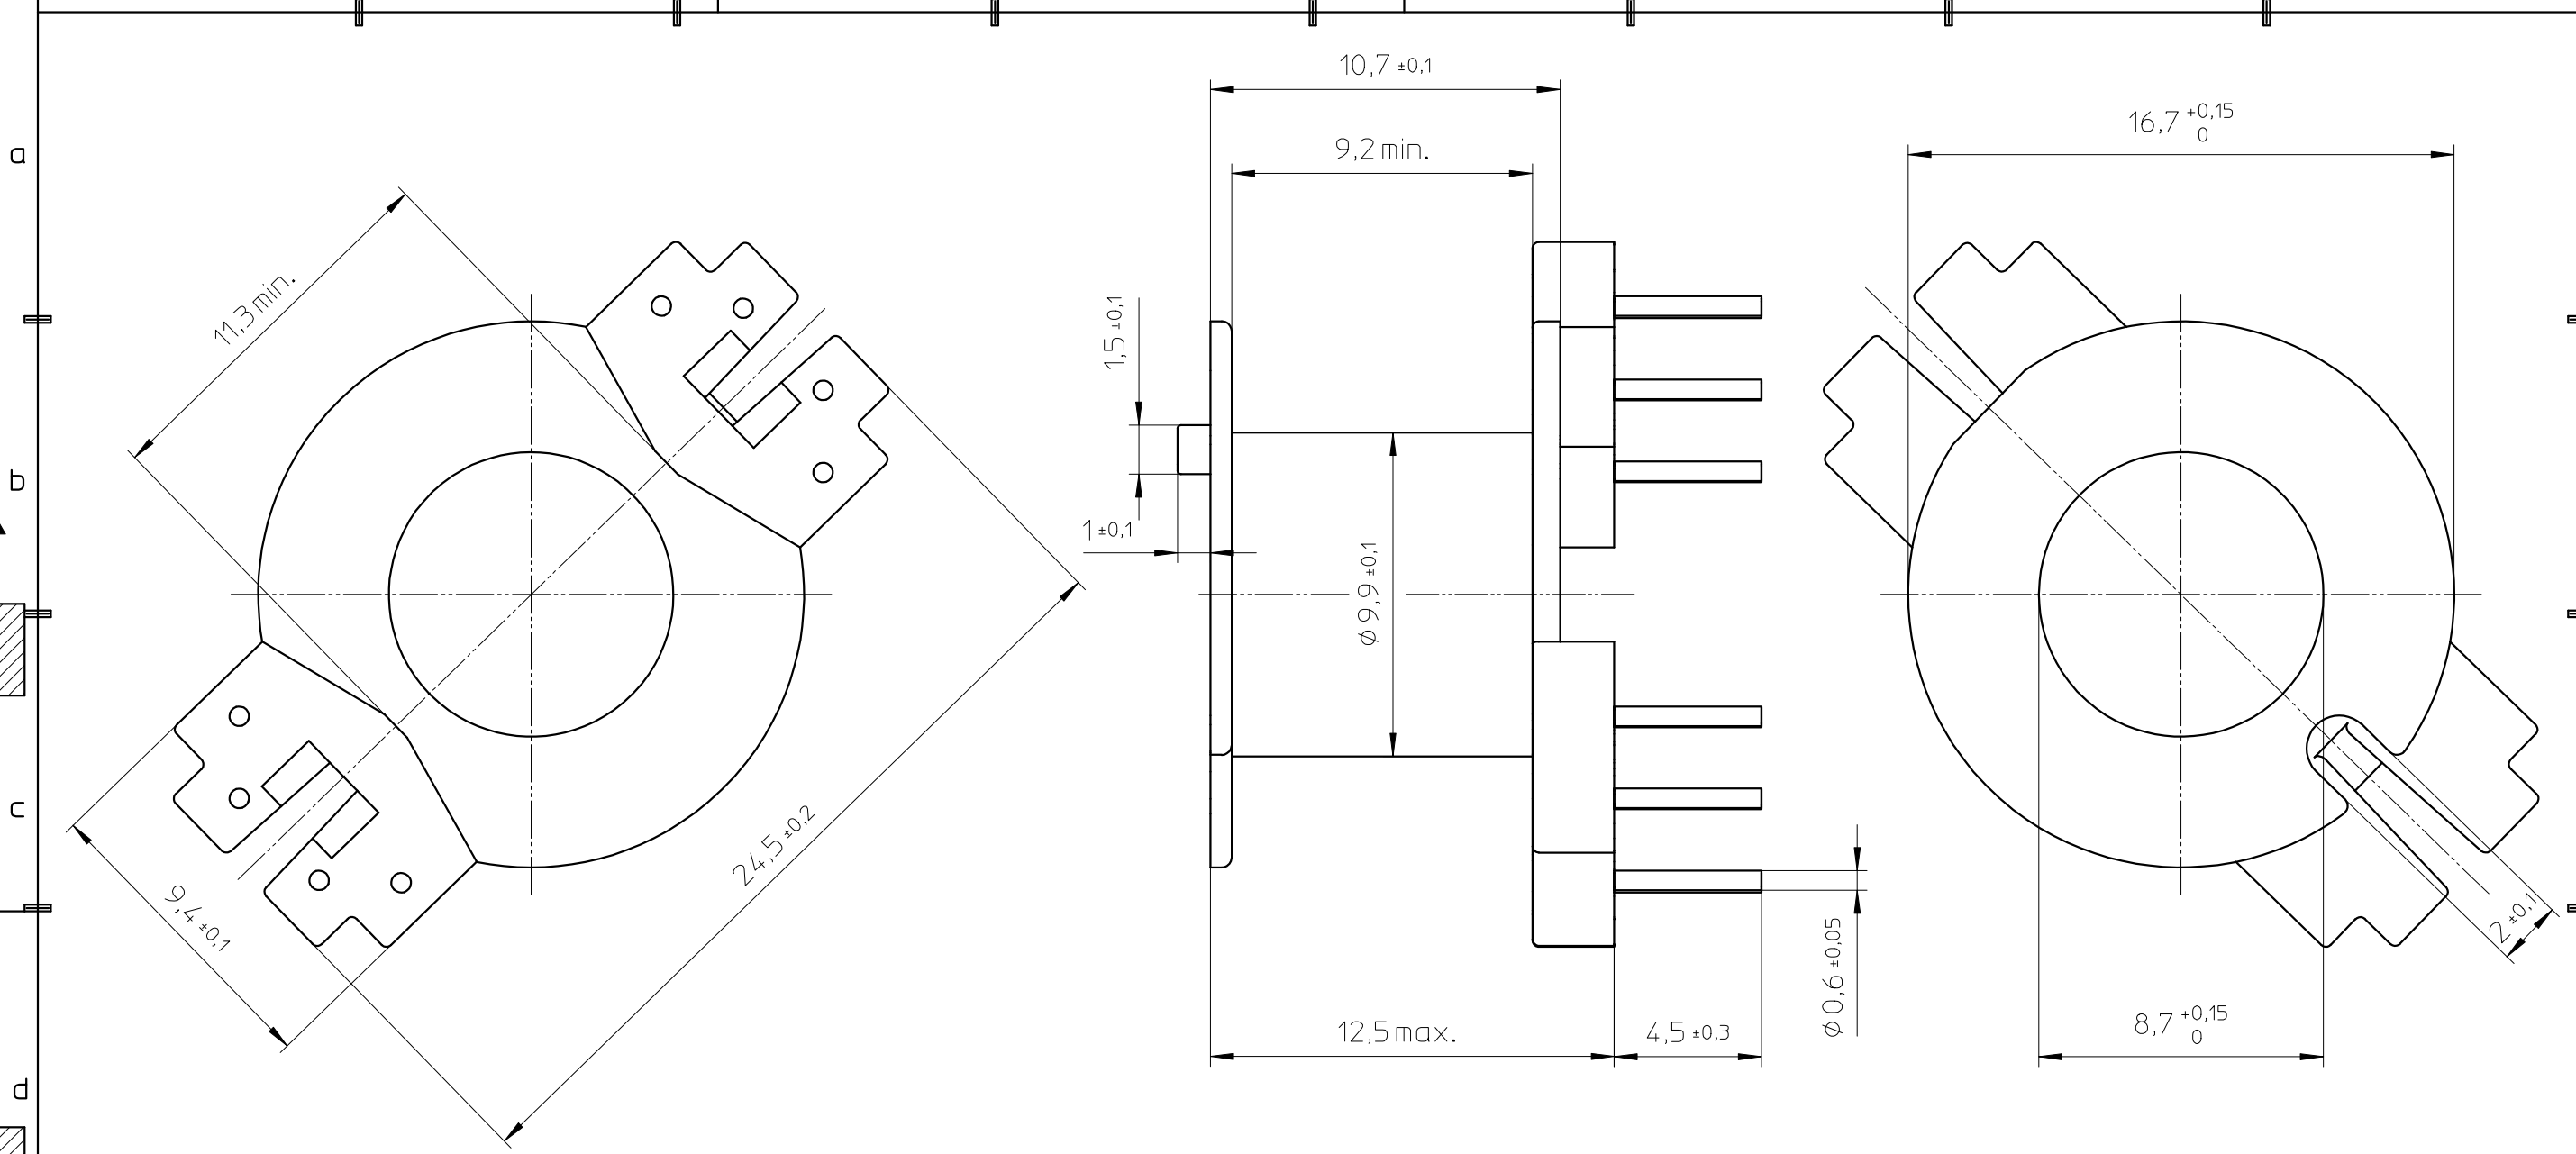

HOLE PATTERN:

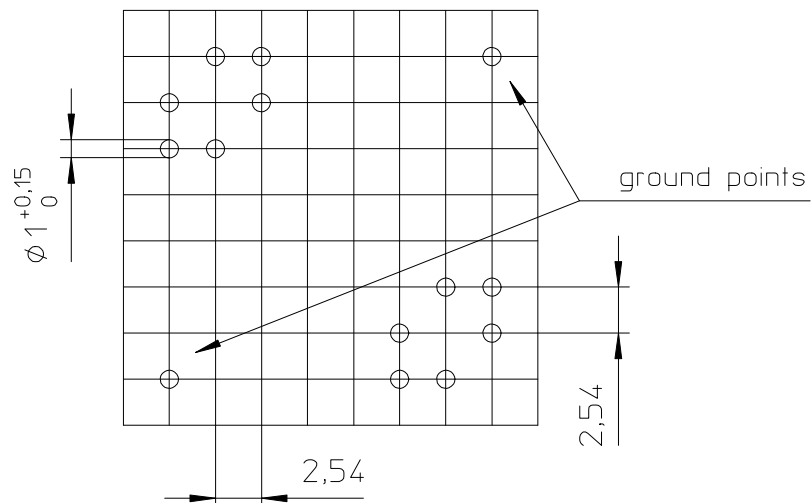

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429(M) - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 150°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.  
 Min. winding area: 31 mm<sup>2</sup>.  
 Mean length of turn: 42 mm.



CLASS.NO.		NAME		SUPER.		SH		SH		1998-02-19	
		NAAM		VERV.		BL		BL		1998-07-13	
		MPA		CHECK		DAT.		Property of		2000-03-08	
		CONTR.		98-02-19		© FERROXCUBE 2000					
CSV-RM8-1S-8P-TA				4322 021 02651							
		001		112 - 001		069		A3			