


HOLE PATTERN:

Space requirement 8x8 pitch.

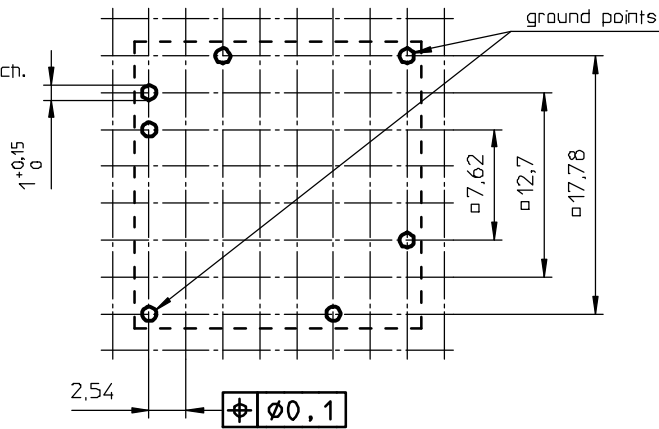

- Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
- UL file number: E61040 - UL94V-0.
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class F. 155°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min winding area: 30 mm².
- Mean length of turn: 42 mm.

CLASS NO.		04-09-28	
		90-05-16	
89-12-15		97-04-18	
		00-05-02	
		00-08-01	
NAME M. Veekens	SUPERS VERB.	1	SP BL 112 - 001
MPA	CHECK CONTR.	DATE 89-03-15	Property of Eigendoms van © FERROXCUBE 2000
CSV-RM8-2S-5P		4322 021 34691	
		010	
		A3	