

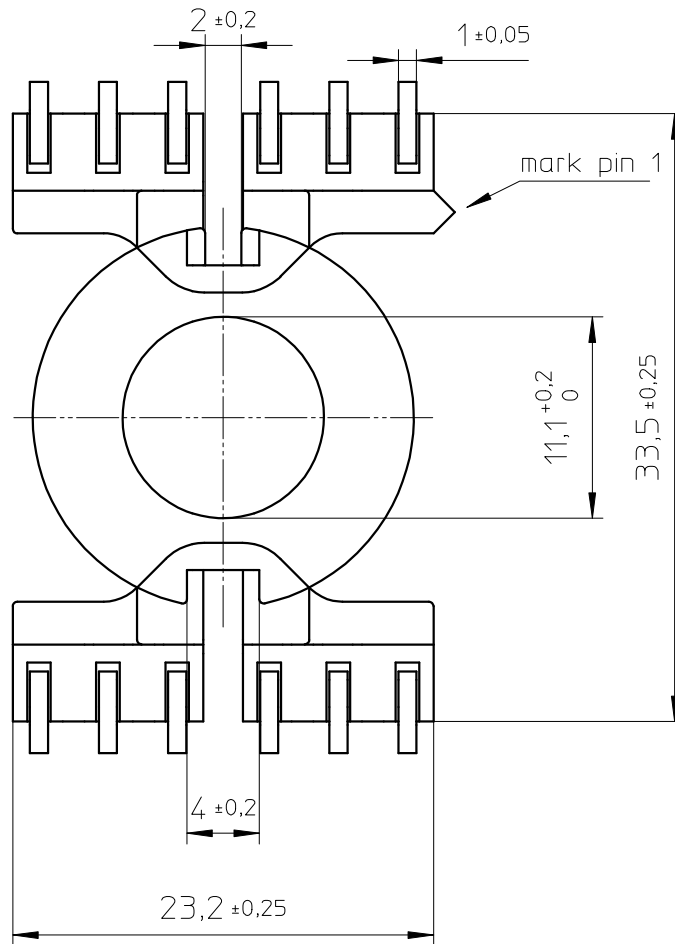
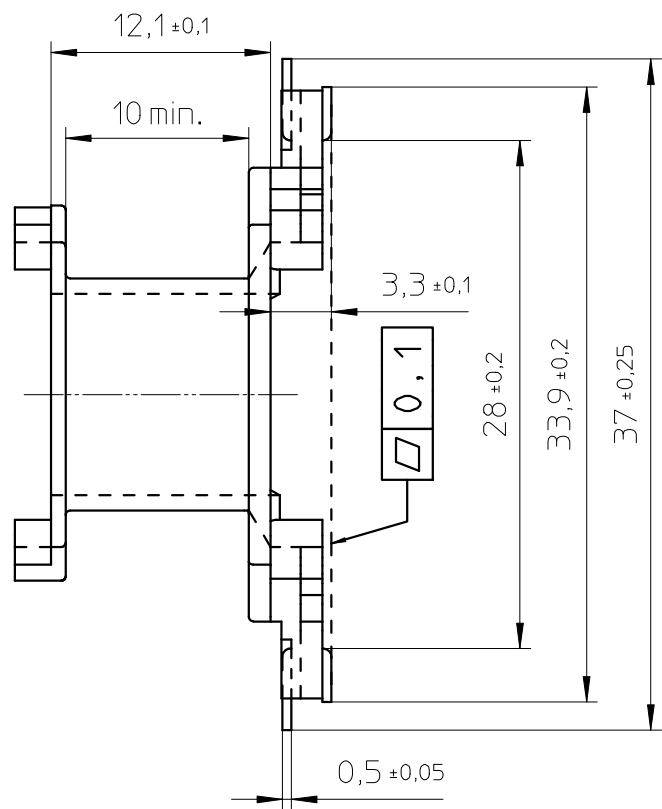



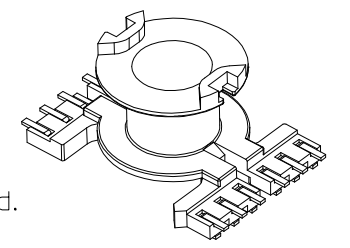


FERROXCUBE

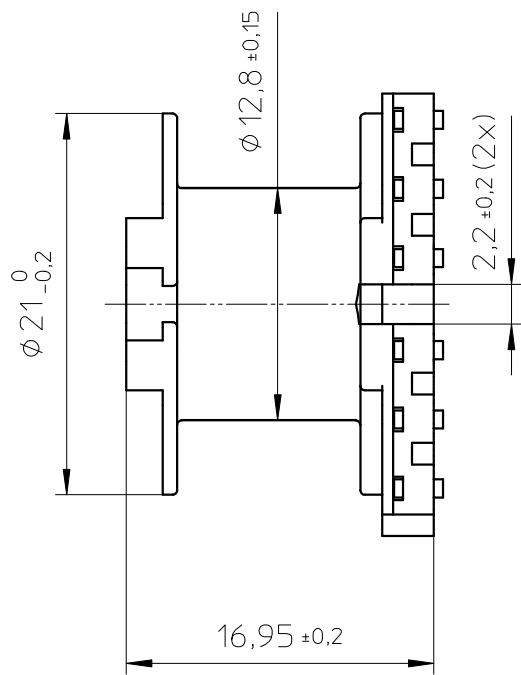

Proposed pad arrangement:

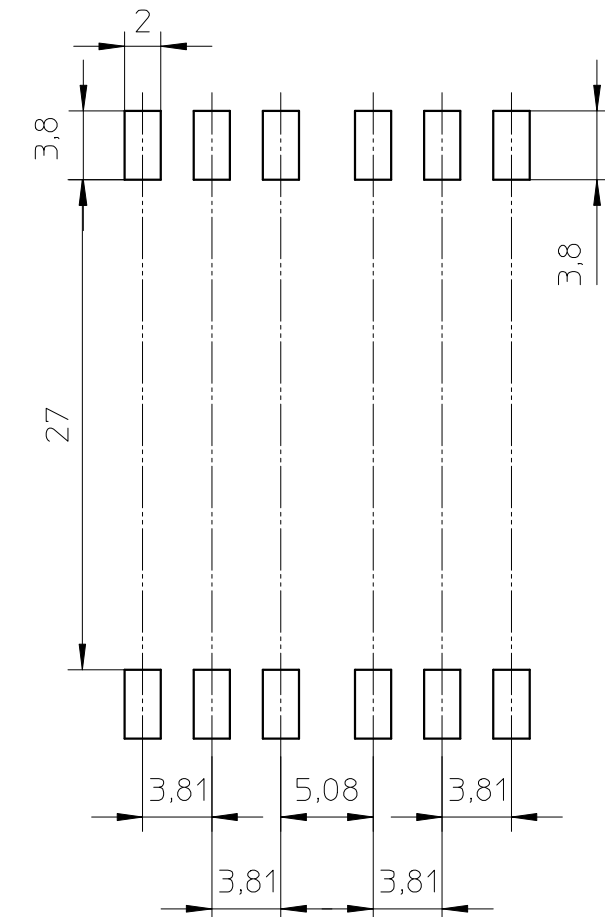

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number E41429 - UL94V-0.

Pin material: CuSn, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class H, 180°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 40,5 mm²

Mean length of turn: 53,0 mm.

CLASS.NO.		CSVS-RM10-1S-12P		4322 021 04011		02-07-23	
						02-08-26	
NAME NAAM	J. Tjon	SUPERS. VERV.	8222 294 47501	001	SH BL.	112 - 001	069
MPA	CHECK CONTR.	DAT.	02-06-06	Property of Eigendom van		© FERROXCUBE 2000	
							A3