


HOLE PATTERN:
Space requirement 7x7 pitch.

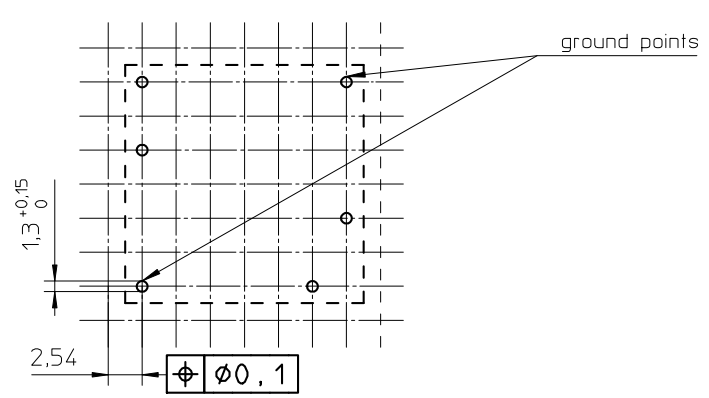

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429 - UL94V-0.
Pin material: Copperclad steel, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
Min. winding area: 21 mm².
Mean length of turn: 35 mm.

CLASSNO.		2009-09-22	
		2009-10-05	
NAME NAAM		M.Tryngiel	
SUPERVISOR VERV.		1	
DATE DAT.		09-09-22	
PROPERTY Eigendom van		© FERROXCUBE	
DRAWING NO. TEKENING NR.		112 - 001	
REV.		010	
SCALE		A3	
PART NO.		4322 021 07201	
CLASSNO.		CSV-RM7-1S-5P-C	