





**FERROXCUBE**

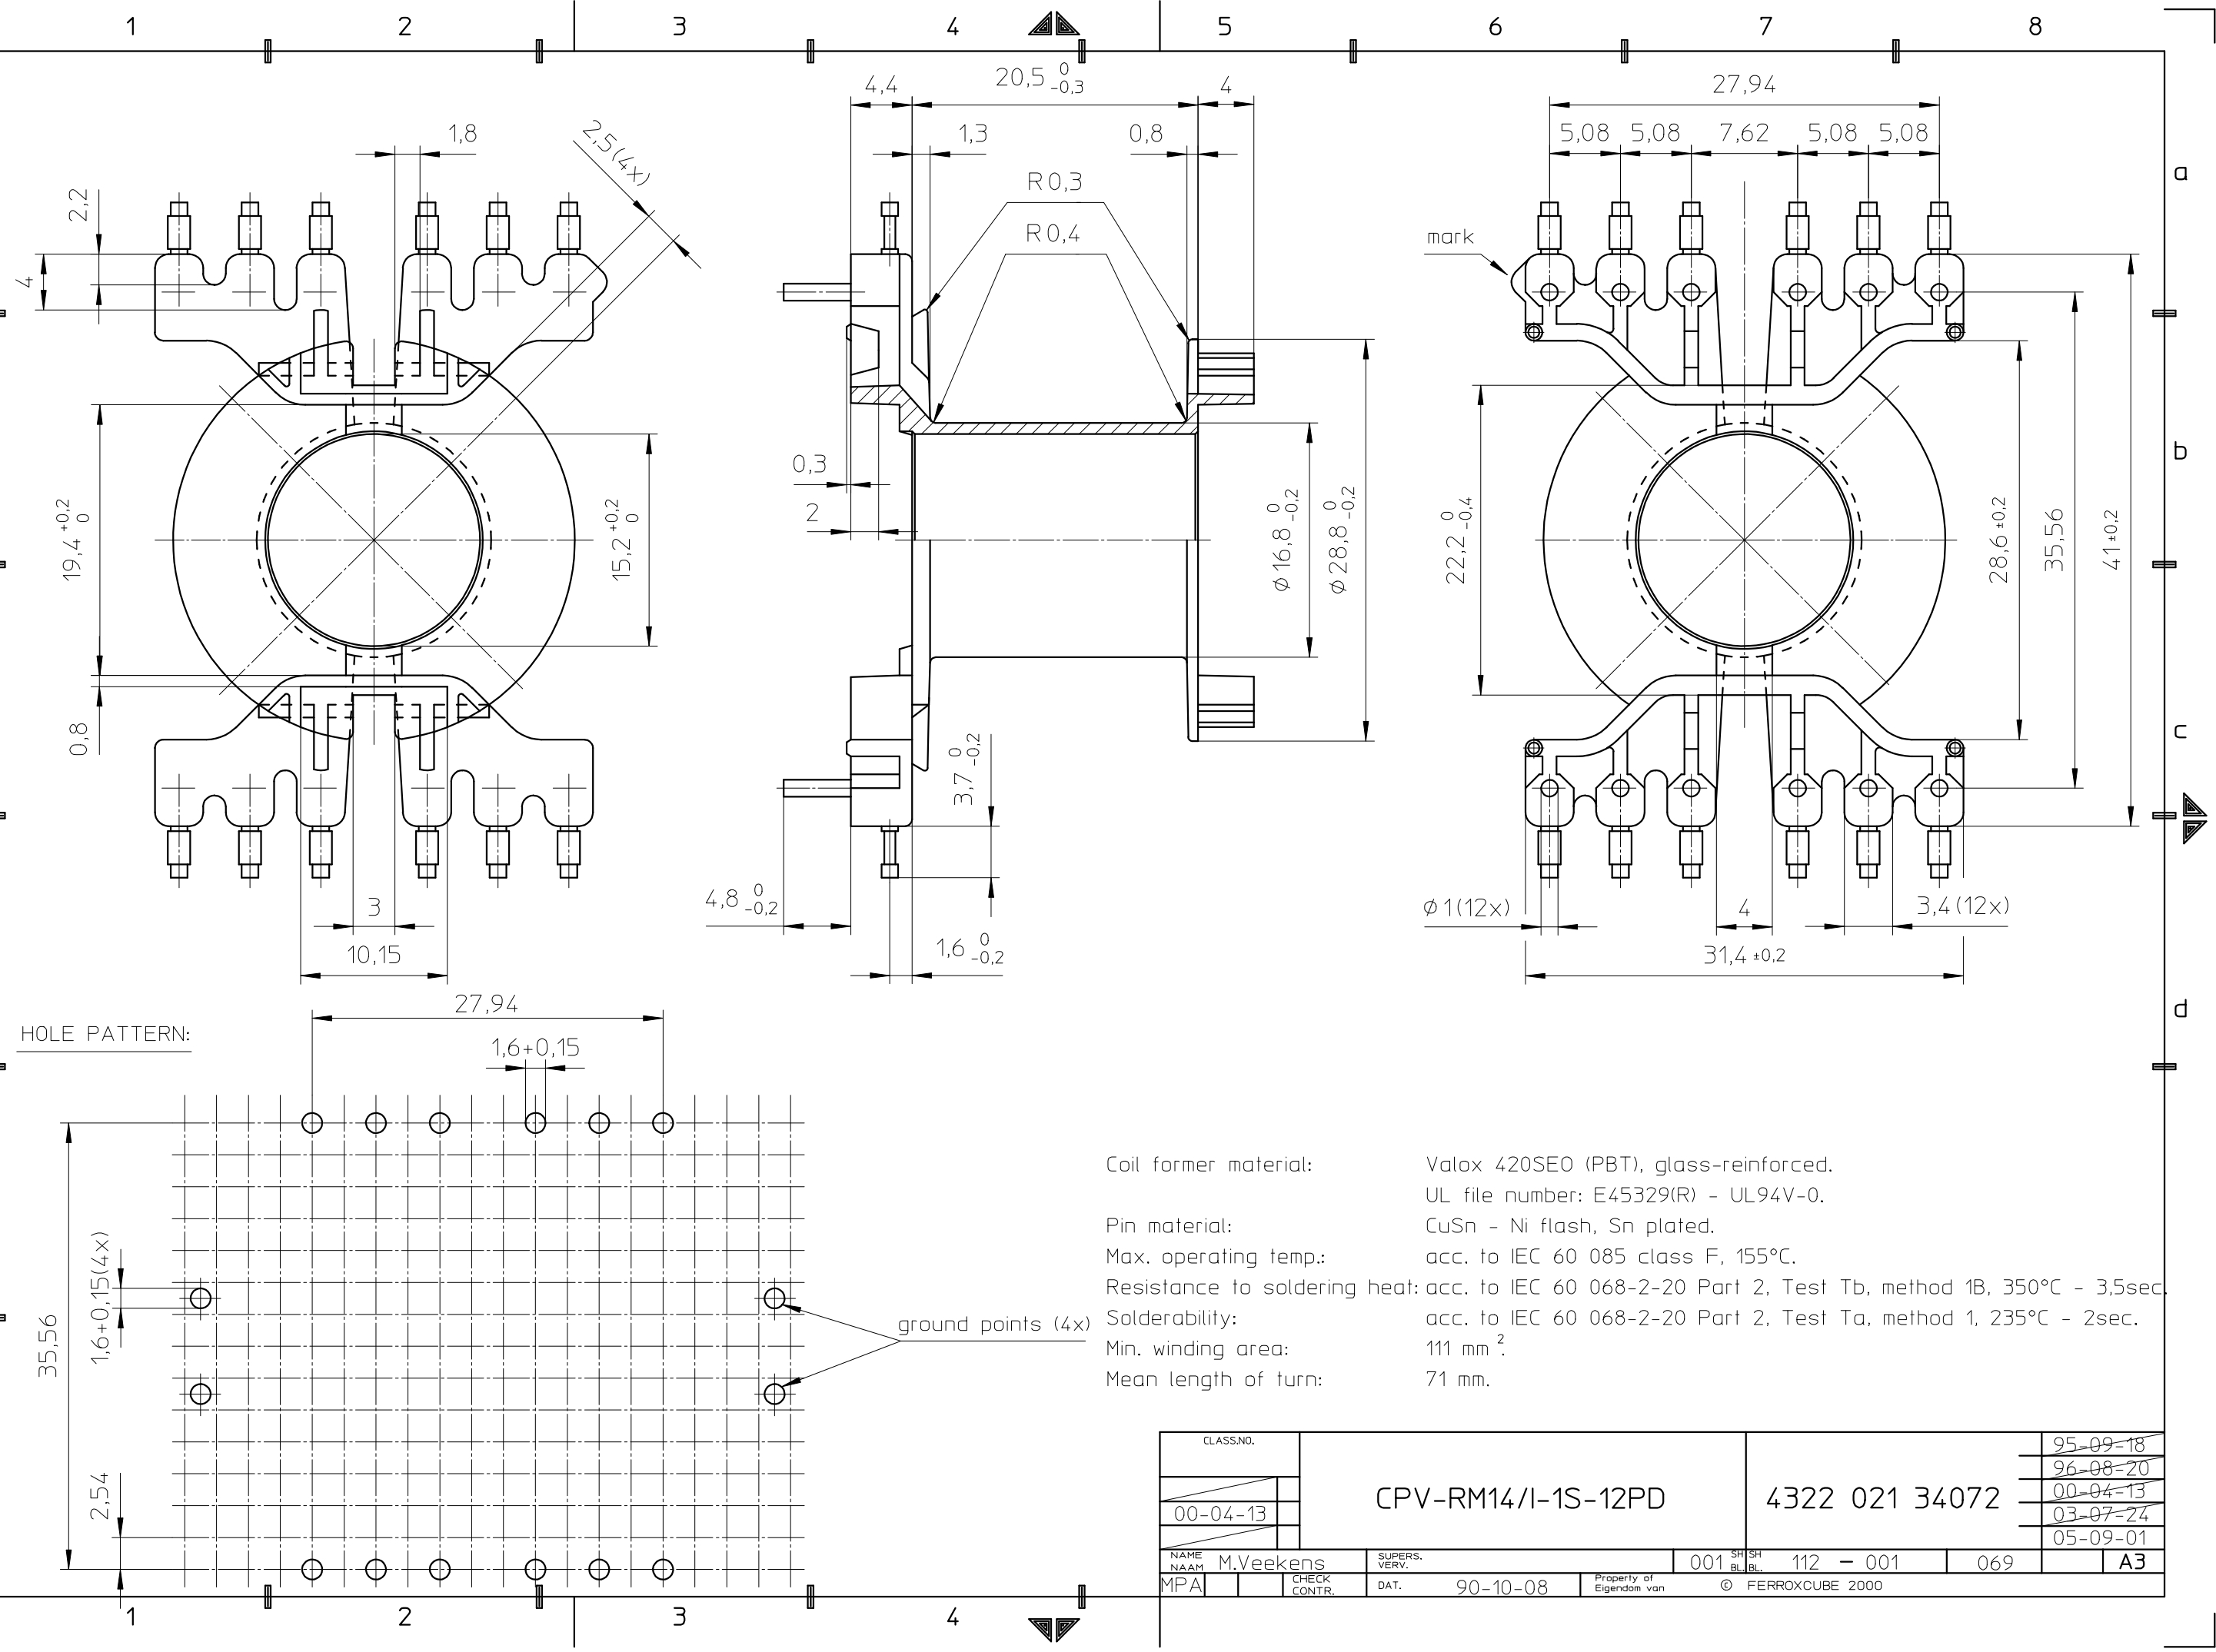

e

f



HOLE PATTERN:

Coil former material: Valox 420SE0 (PBT), glass-reinforced.  
 UL file number: E45329(R) - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 111 mm<sup>2</sup>.  
 Mean length of turn: 71 mm.

CLASS.NO.					95-09-18
					96-08-20
					00-04-13
					03-07-24
					05-09-01
00-04-13	CPV-RM14/I-1S-12PD	4322 021 34072			
NAME NAAM MPA	M.Veekens	SUPERS. VERV.	001 SH SH BL BL	112 - 001	069
CHECK CONTR.	DAT.	90-10-08	Property of Eigendom van	© FERROXCUBE 2000	
					A3