


HOLE PATTERN:

Space requirement 7x7 pitch.

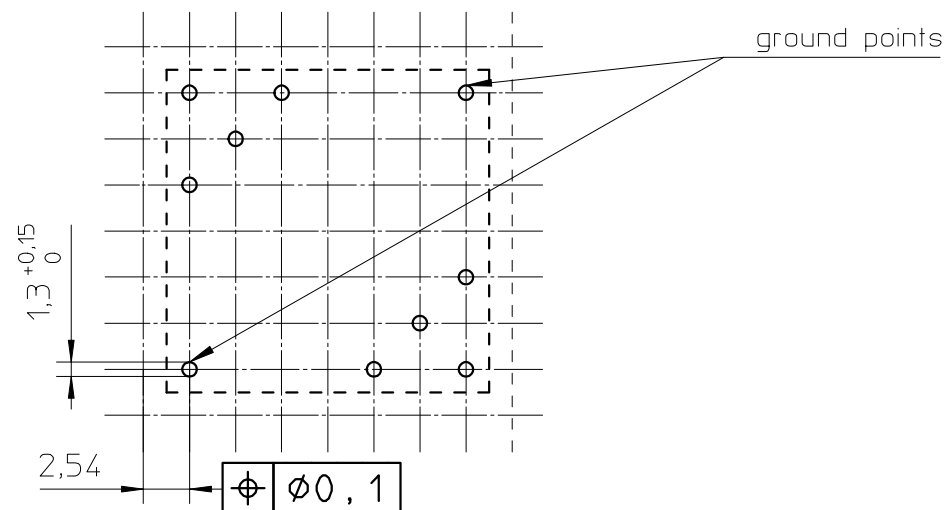

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copperclad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
 Min. winding area: 21 mm².
 Mean length of turn: 35 mm.

CLASS.NO.	2005-10-19	
CSV-RM7-1S-8P-C		4322 021 04571
NAME NAAM	Veekens	1 SH SH BL BL 112 - 001 010
MPA	CHECK CONTR.	DAT. 05-10-19
Property of Eigendom van		© FERROXCUBE 2002
		A3