





FERROXCUBE


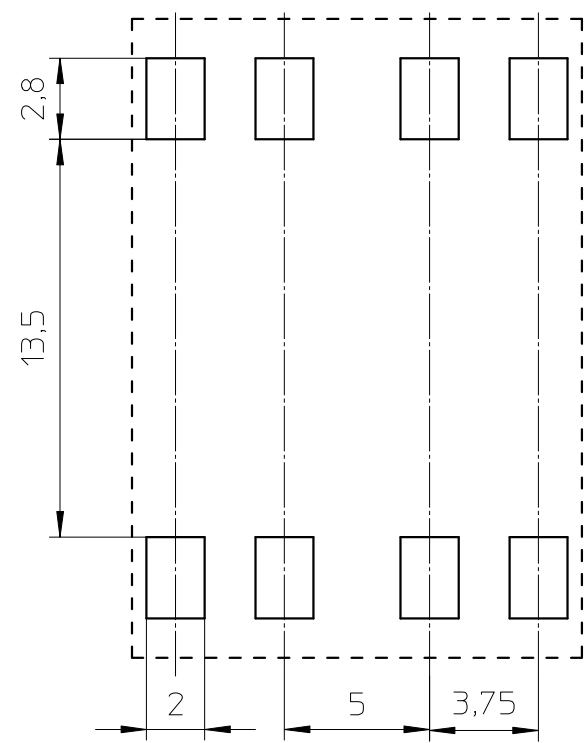


e


f

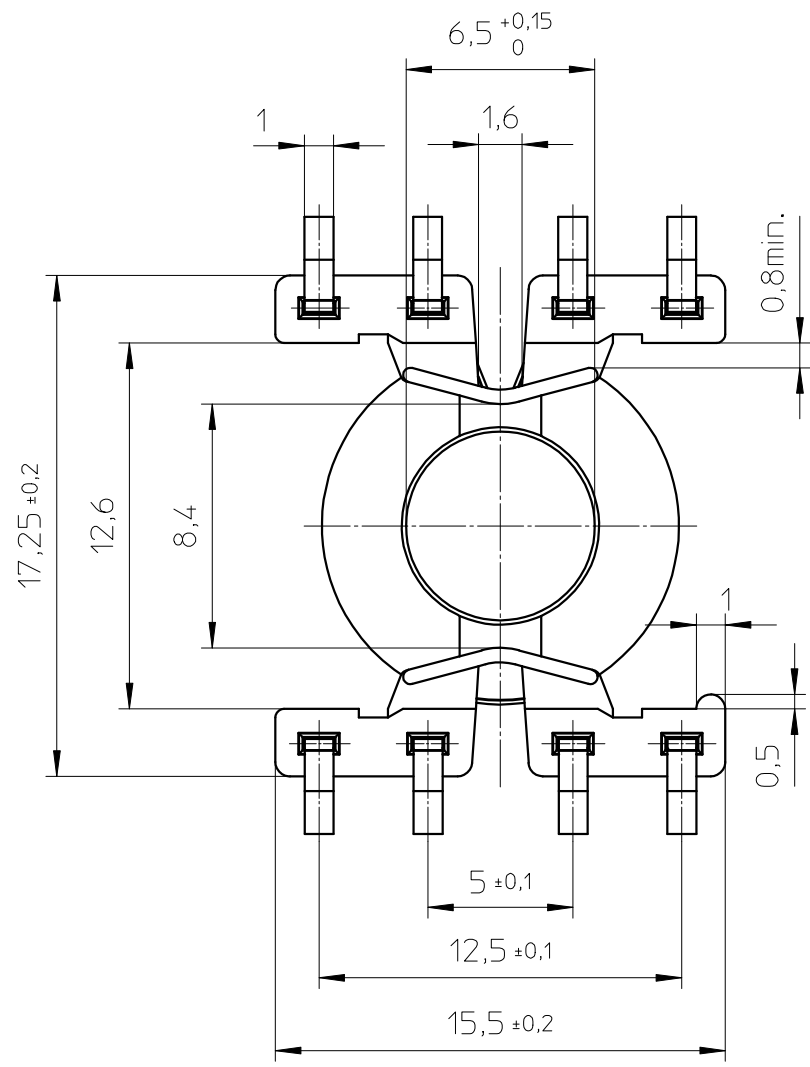

PROPOSED PAD ARRANGEMENT:

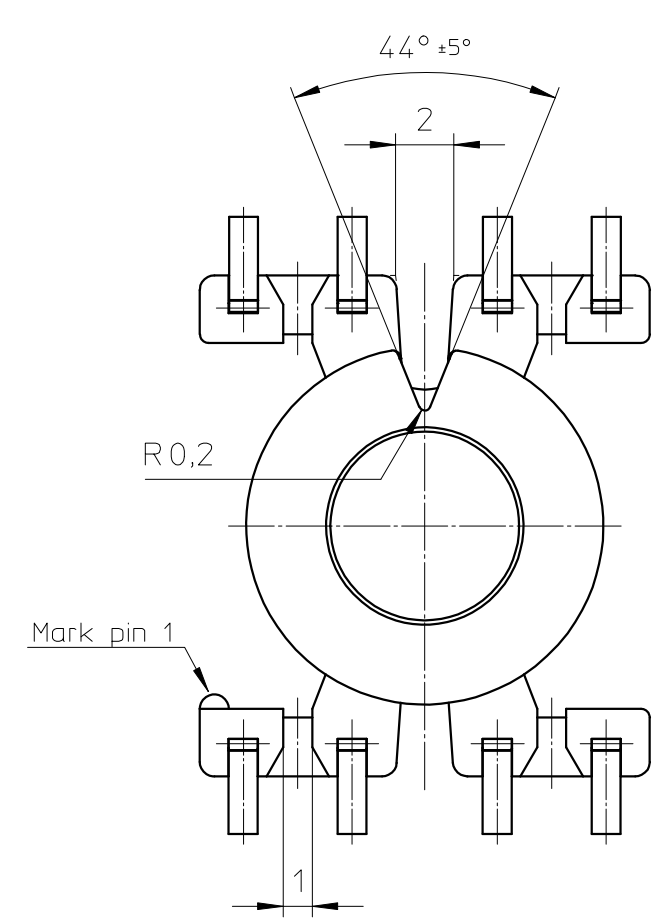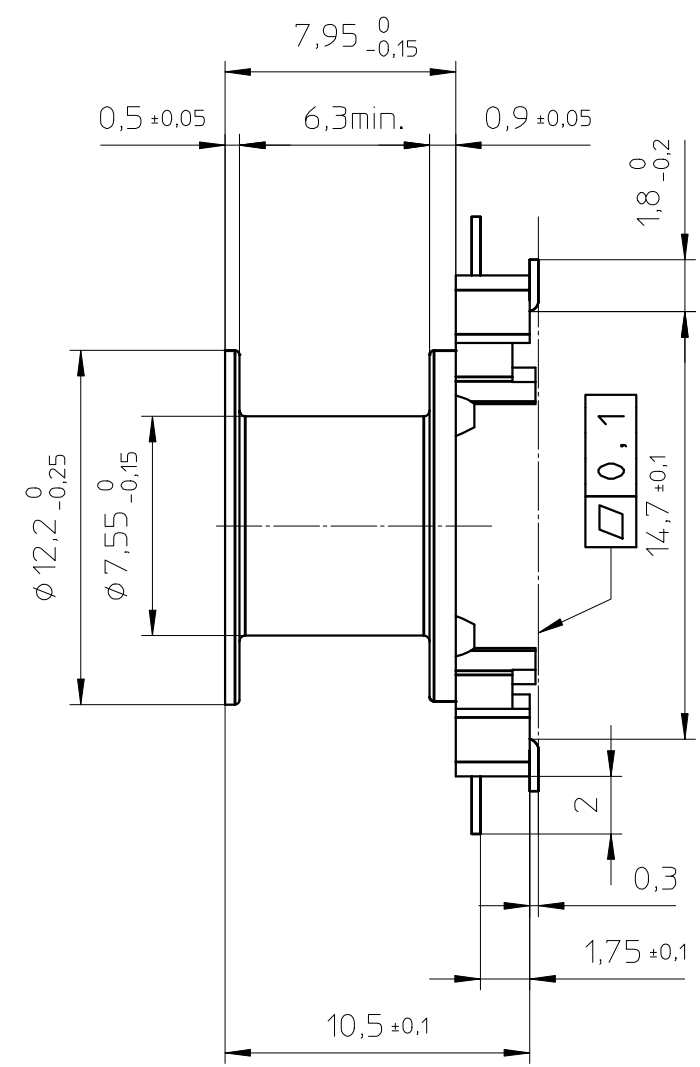

- Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.
- Pin material: CuSn6, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
- Min. winding area: 14 mm².
- Mean length of turn: 31 mm.



CLASS.NO.	99-02-25	
	99-04-09	
	00-05-17	
	2004-09-28	
	2004-11-05	
NAME NAAM	M.Veekens	SUPERS. VERV.
MPA	CHECK CONTR.	DAT.
	98-07-03	Property of Eigendom van
	001	SH SH BL BL
	112 - 001	069
		A3

CSV5-RM6S-1S-8P

4322 021 02901

© FERROXCUBE 2000