
# FERROXCUBE



Supersedes data of September 2004

2008 Sep 01

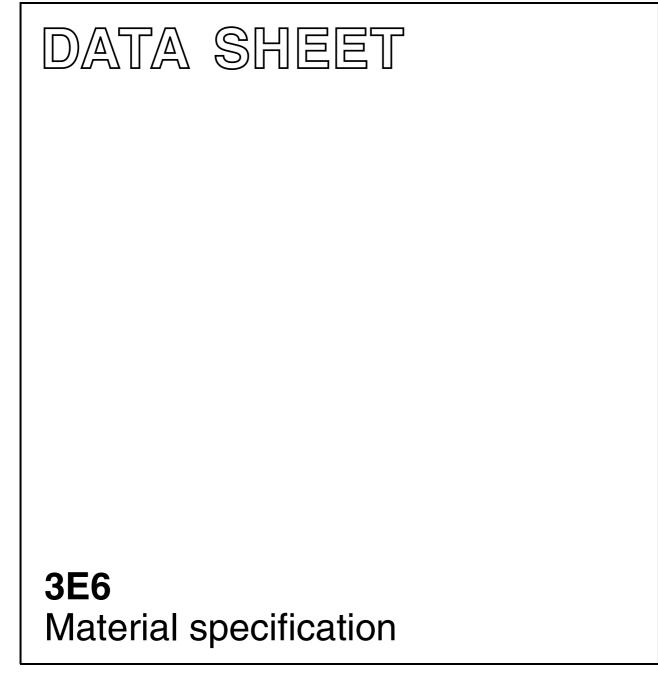

## Material specification


### **3E6 SPECIFICATIONS**


A high permeability material optimized for use in wideband transformers as well as EMI-suppression filters.


	CONDITIONS	VALUE <sup>(1)</sup>	UNIT
μ	25 °C; ≤10 kHz;	$12000\pm20\%$	
	0.25 mT		
В	25 °C; 10 kHz;	≈ 390	mT
	1200 A/m		
	100 °C; 10 kHz;	≈ 220	
	1200 A/m		
tanδ/μ <sub>i</sub>	25 °C; 10 kHz; 0.25 mT	$\leq 10 \times 10^{-6}$	
	25 °C; 30 kHz; 0.25 mT	$\leq 30  imes 10^{-6}$	
$\eta_{B}$	25 °C; 10 kHz;	≤ 1 × 10 <sup>-3</sup>	T-1
	1.5 to 3 mT		
ρ	DC; 25 °C	≈ 0.1	Ωm
Т <sub>С</sub>		≥ 130	°C
density		≈ 4900	kg/m <sup>3</sup>

#### Note


1. Measured on sintered, non-ground ring cores of dimensions  $Ø14 \times Ø9 \times 5$  which are not subjected to external stresses.

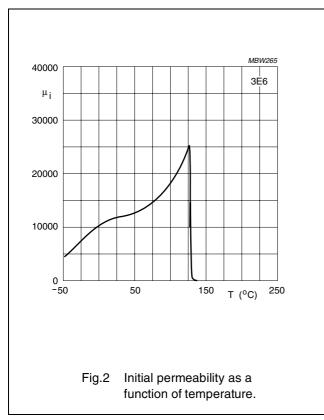

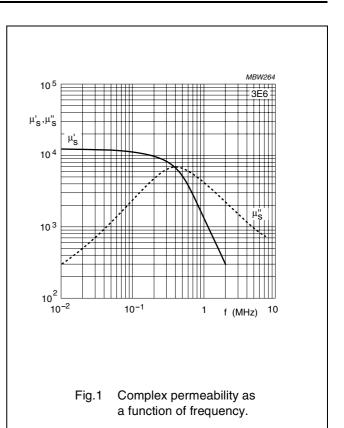

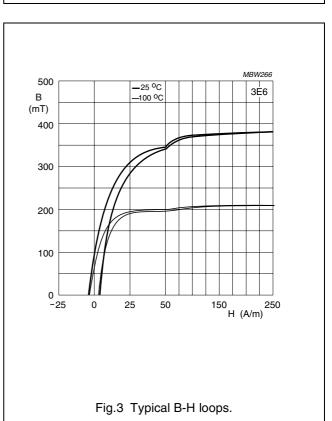

# Material specification

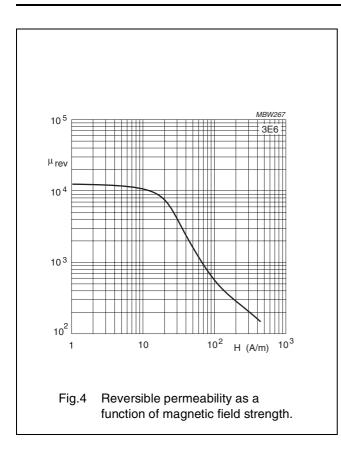

### Material specification

### DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

### DISCLAIMER

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

### **PRODUCT STATUS DEFINITIONS**

STATUS	INDICATION	DEFINITION
Prototype	prot	These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in	des	These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support	sup	These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.