

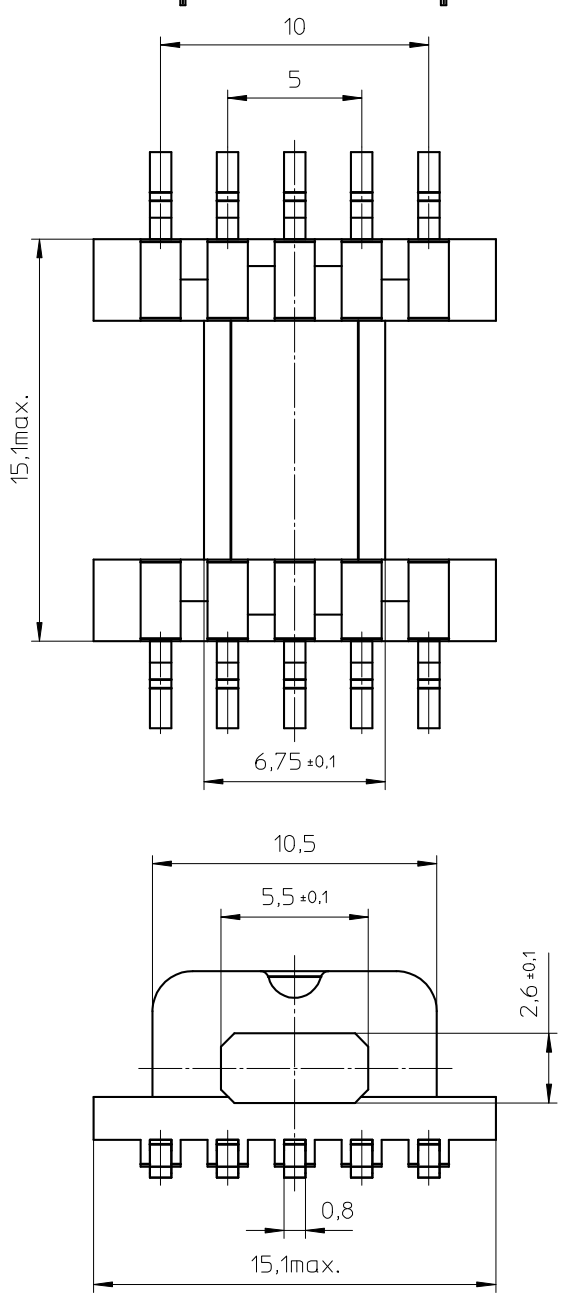



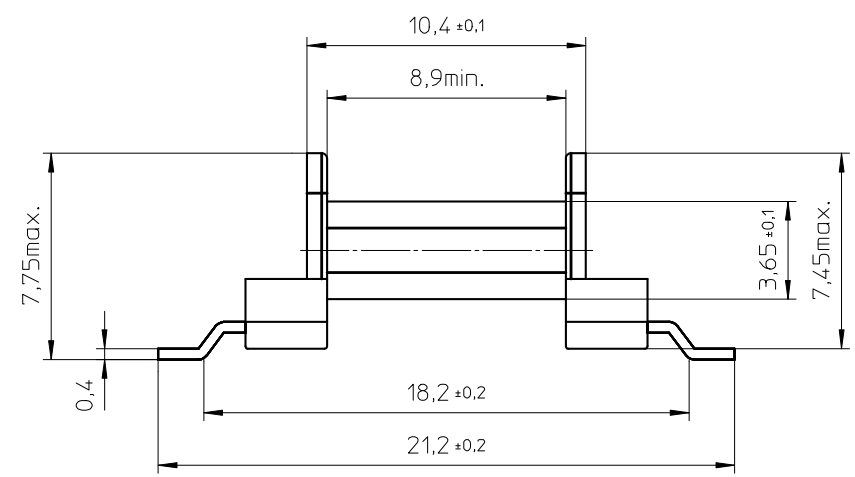

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705(M) - UL94V-0  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.  
 Min. winding area: 16 mm<sup>2</sup>.  
 Mean length of turn: 26 mm.

PROPOSED PAD ARRANGEMENT:

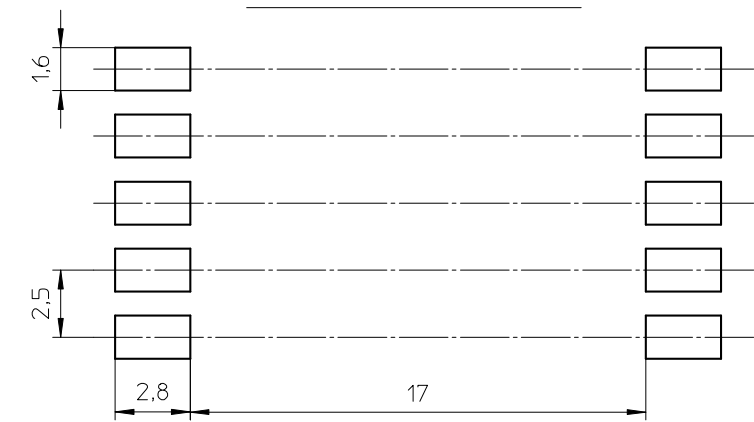

|          |            |                   |                |              |                   |               |     |   |     |     |            |
|----------|------------|-------------------|----------------|--------------|-------------------|---------------|-----|---|-----|-----|------------|
| CLASSNO. |            | CPHS-EFD15-1S-10P |                |              |                   | 4322 021 0292 |     |   |     | 1   | 1998-07-22 |
|          |            |                   |                |              |                   |               |     |   |     | 1   | 2004-04-01 |
|          |            |                   |                |              |                   |               |     |   |     | 1   | 2005-03-08 |
|          |            |                   |                |              |                   |               |     |   |     | 1   | 2006-07-31 |
|          |            |                   |                |              |                   |               |     |   |     | 1   | 2012-07-10 |
| NAME     | M.Trynqiel | SUPERS.           | 8222 294 46351 | 001          | SP                | SH            | 112 | - | 001 | 069 | A3         |
| MPA      |            | CHECK             | 98-07-22       | Property of  | © FERROXCUBE 2000 |               |     |   |     |     |            |
|          |            | CONTR.            |                | Eigendom van |                   |               |     |   |     |     |            |