
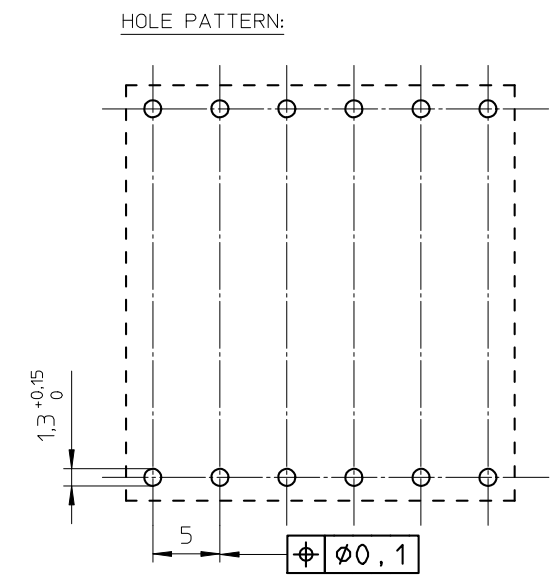
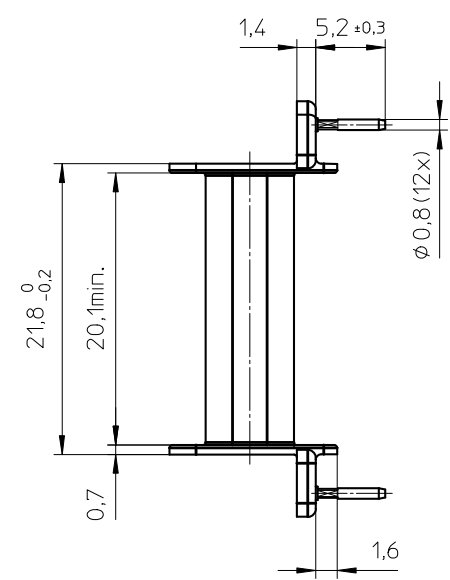
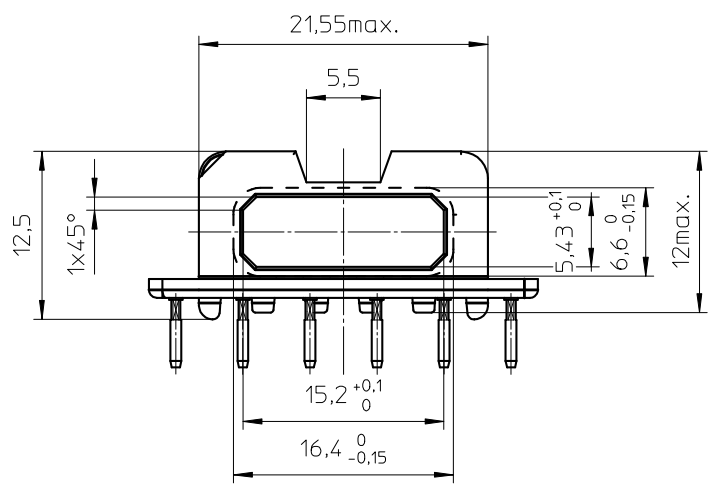


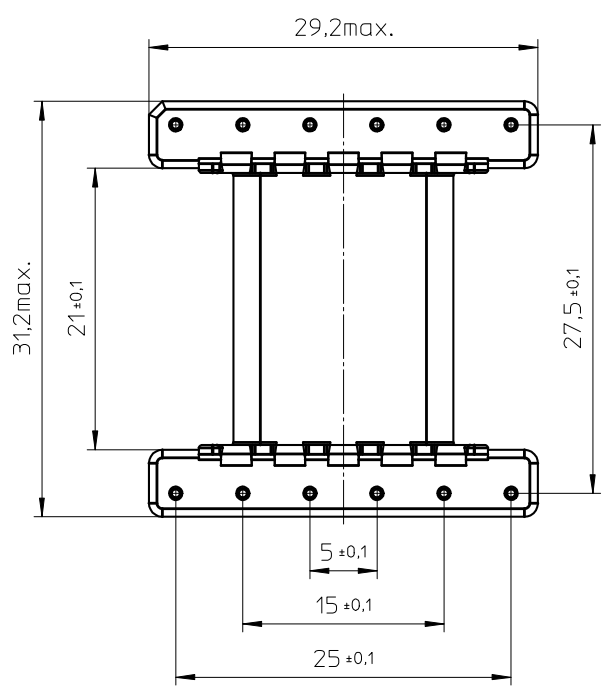

Coil former material:

Sumikon PM-9630 (PF), glass-reinforced.
UL file number: E41429- UL94V-0.

Pin material:

CuSn - Ni flash, Sn plated.

Max. operating temp.:

acc. to IEC 60 085 class H, 180°C.

Resistance to soldering heat:

acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability:


acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area:

52,3 mm².

Mean length of turn:

52,9 mm.



CLASSNO.		CSH-EFD30-1S-12P-IZ				4322 021 06951				07-11-09					
07-11-09										11-07-12					
NAME NAAM		M.Trynqiel		SUPERS. VERV.		001		SH BL		112 - 001		069		A3	
MPA				CHECK CONTR.		DAT.		07-11-09		Property of Eigendom van		© FERROXCUBE 2000			