


HOLE PATTERN:

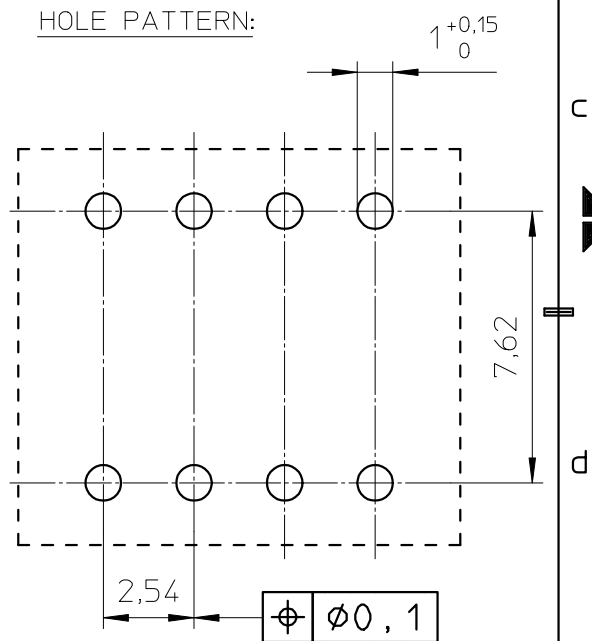

Coil former material: Sumikon PM9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 11,4 mm²
 Mean length of turn: 21,4 mm.

CLASS.NO.		CSH-EP10-1S-8P	4322 021 00461	1	93-12-17
				1	96-01-23
97-01-09				1	97-01-09
				1	99-10-06
				1	2004-09-28
NAME NAAM	M.Veekens	SUPERS. VERV.	1 SH BL.	112	- 001 010
MPA	CHECK CONTR.	DAT.	93-11-16	Property of Eigendom van © FERROXCUBE 2000	
