
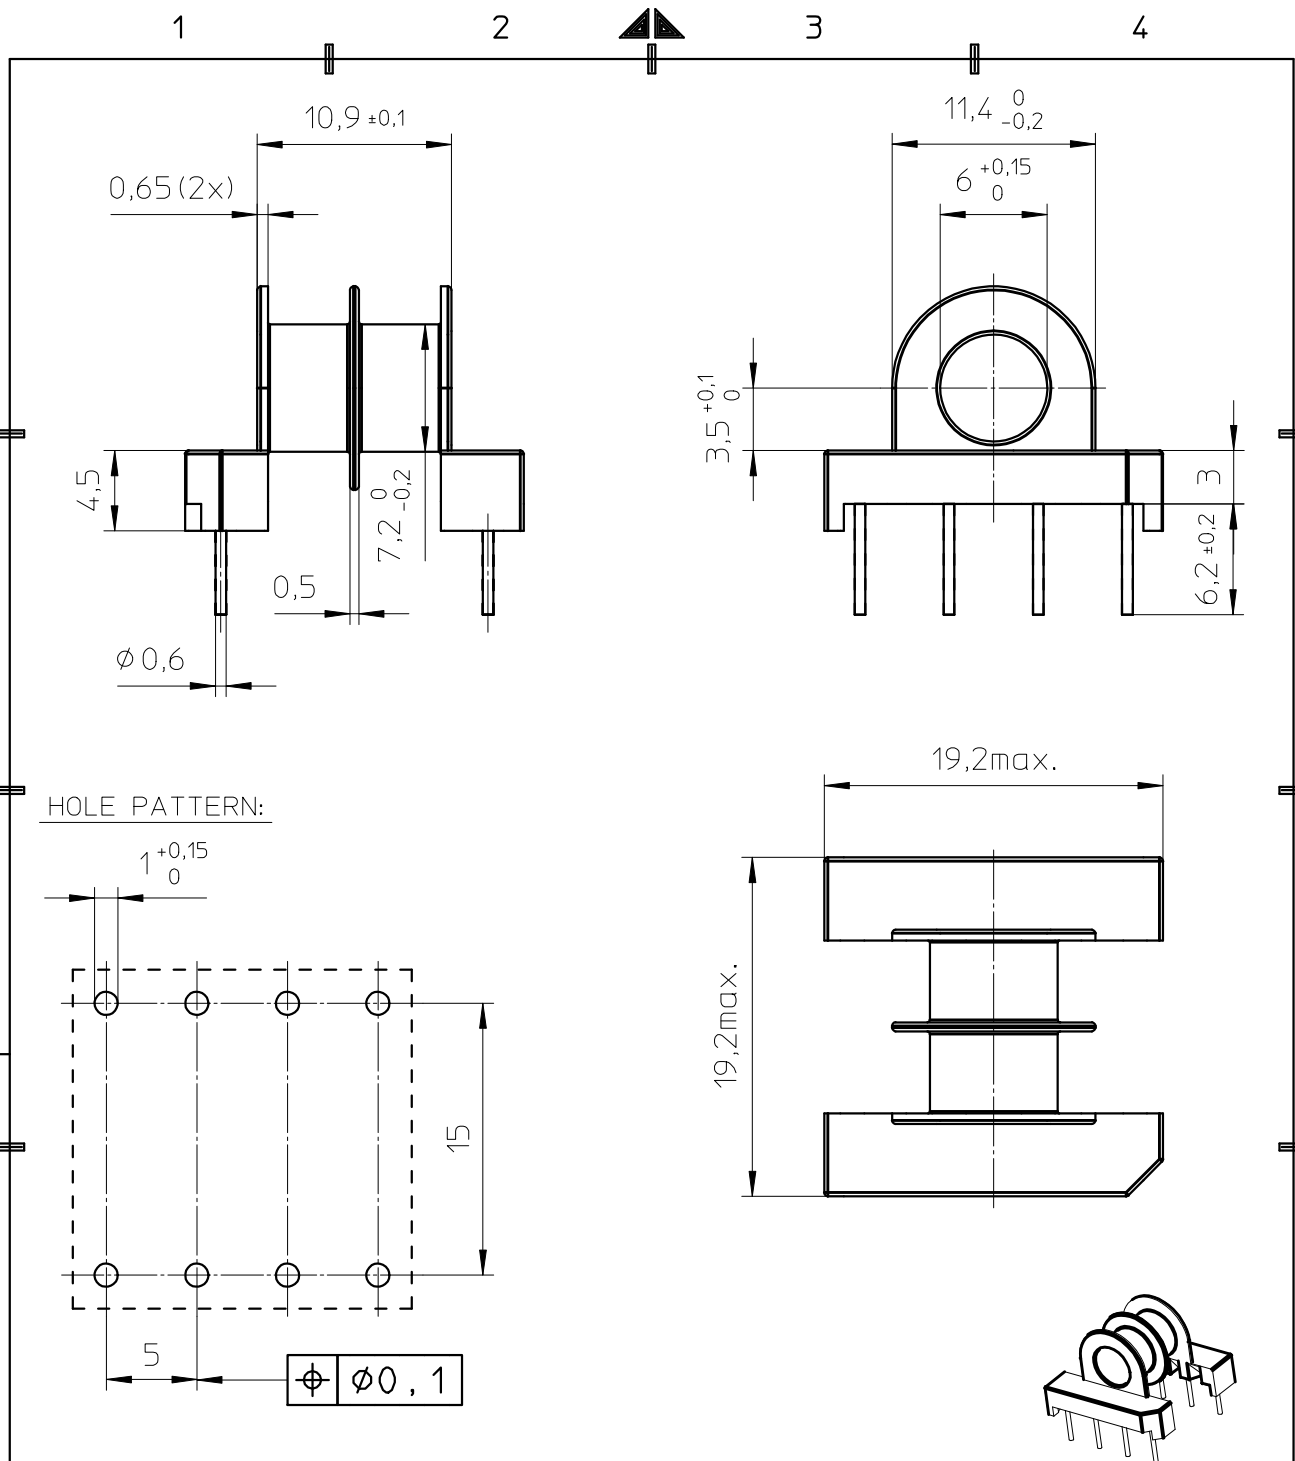



FERROXCUBE



Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1A, 260°C - 5s.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
 Min. winding area: 17,4 mm².
 Mean length of turn: 28,9 mm.

CLASS.NO.		CSH-EP17-2S-8P		4322 021 00491		96-06-07	
97-01-29						96-09-20	
						97-01-29	
						98-01-28	
NAME NAAM MPA		A.Wojtasz	SUPERS. VERV.	1	SH BL.	112 - 001 010	98-01-28
CHECK CONTR.		DAT.	96-06-07	Property of Eigendom van		© FERROXCUBE 2000	06-06-28
							A4