


HOLE PATTERN:

Space requirement 5x5 pitch.

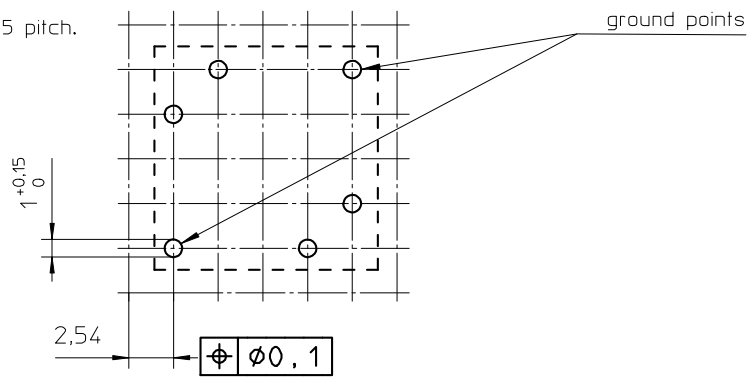

- Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
UL file number: E41429 - UL94V-0.
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
- Min. winding area: 8,6 mm².
- Mean length of turn: 25 mm.

| | | | |
|-----------------------------|-----------------|------------------|-----------|
| CLASSNO. | | 07-11-08 | |
| 07-11-08 | | CSV-RM5-2S-4P-IZ | |
| 4322 021 06881 | | 07-11-08 | |
| NAME NAAM | A.Wojtasz | SUPERS. VERV. | 1 |
| MPA | CHECK CONTR. | DAT. | 07-11-08 |
| Property of Eigendom van | | SH BL | 112 - 001 |
| © FERROXCUBE 2007 | | 010 | A3 |