


HOLE PATTERN:

Space requirement 5x5 pitch.

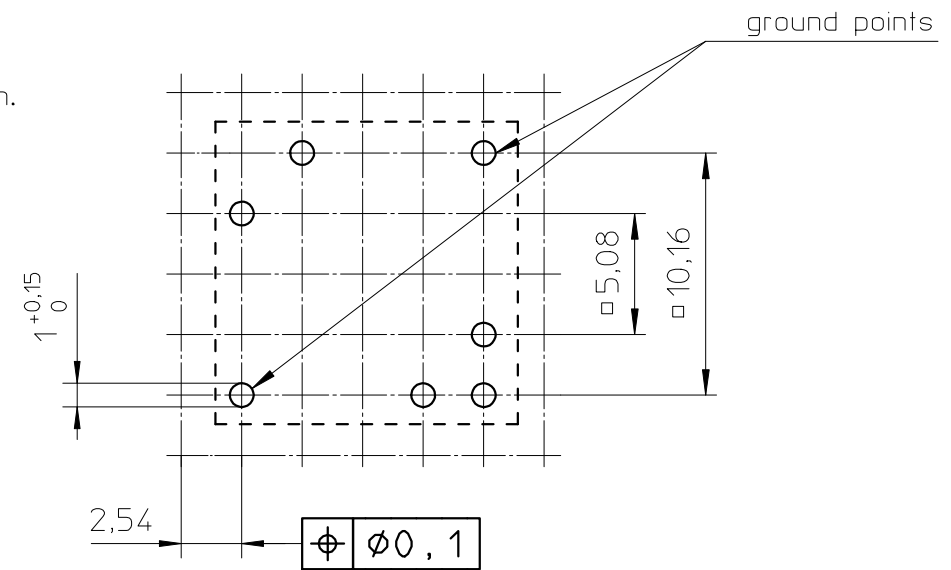

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
 UL file number: E61040 - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
 Min. winding area: 9,2 mm.²
 Mean length of turn: 24,9 mm.

| | | | |
|--------------|-----------------|-----------------------------|-----------------------|
| CLASS.NO. | | | 97-04-18 |
| | | | 00-05-02 |
| | | | 00-08-01 |
| | | | 03-06-30 |
| | | | 05-09-01 |
| NAME NAAM | M.Veekens | SUPERS. VERV. | 1 SH SH 112 - 001 010 |
| MPA | CHECK CONTR. | DAT. | 03-04-01 |
| | | Property of Eigendom van | © FERROXCUBE 2000 |

CSV-RM5-2S-5P

4322 021 34491

A3