
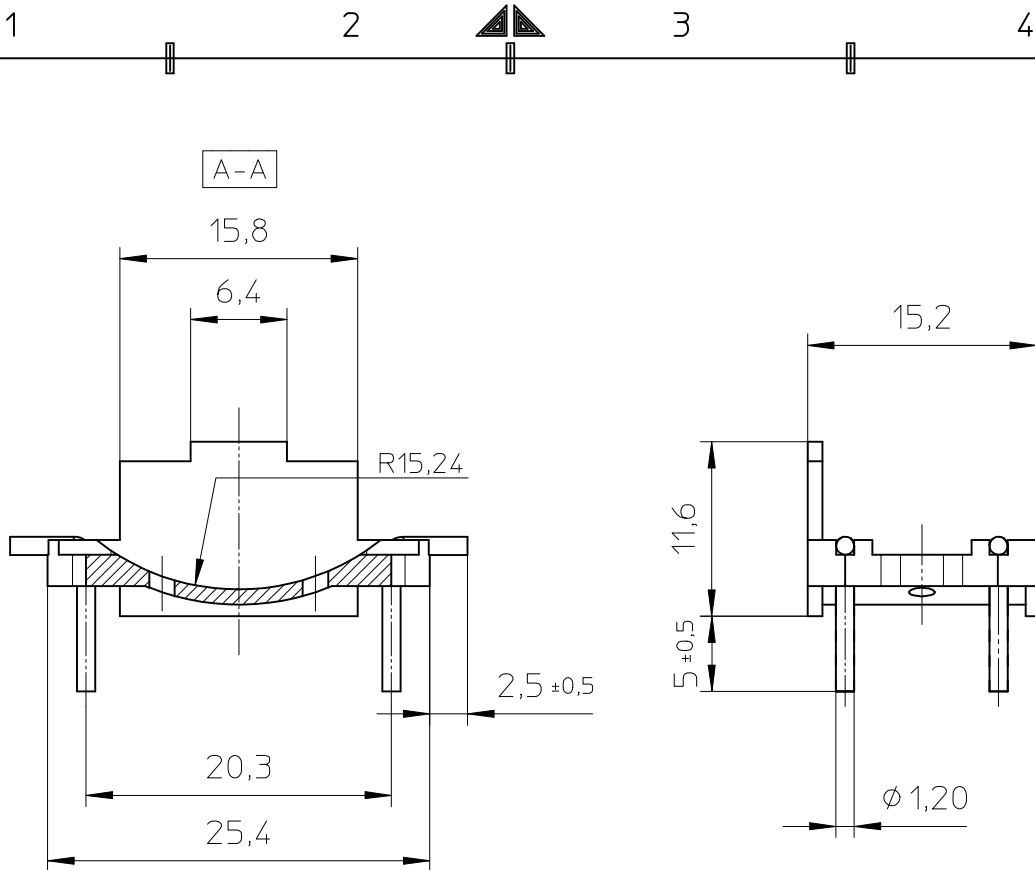




Coil former material: Zytel FR50 (PA6.6), glass-reinforced.
 UL file number: 41938 - UL94V-0.
 Pin material: Copper-plated steel wire, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 130°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s



CLASS.NO.		TGP-30-4PD-Z		4322 021 06631		07-01-23
						07-02-19
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL	SH BL	112 - 001 010
MPA	CHECK CONTR.	DAT.	07-01-23	Property of Eigendom van		© FERROXCUBE 2007
						A4